

Eiki LC X7

EIKI LC X7



The LC X7 LCD projector from Eiki has 9000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The built-in lens shift and keystone correction function provides freedom when setting up. 9000 Ansi lumens ensure that a picture width of 826 cm is also possible. The projector manages rooms with residual light with a smaller image width, we recommend a maximum of 551 cm. Even 1080P video signals are no problem for the projector. On the market since 2008, the model is no longer offered by the manufacturer Eiki, but is still very popular in our projector database.

Brief Introduction

Beta 2.5

Display Type



3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector

9000 / 4500 im singel Lamp Mode

Screen

3000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

4,5000 min. Lumen

1,502 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

XGA 1024 x 768

Resolution

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 330W NSHA Lamp

Articel Nr.: 610-337-0262 / LMP104

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

-

Connections

DVI-D mit HDCP in

5 x BNC RGBHV in

RS232C Din 9 pin in

Weitere Anschlüsse optional.

Ceiling Mounting

Yes

Power


950W

Size WxHxD

530 x 267,5 x 757 mm (20,9"x10,5"x29,8") 107,12 L/dm³

Operating Noise


49 / 48 dB in Eco Mode

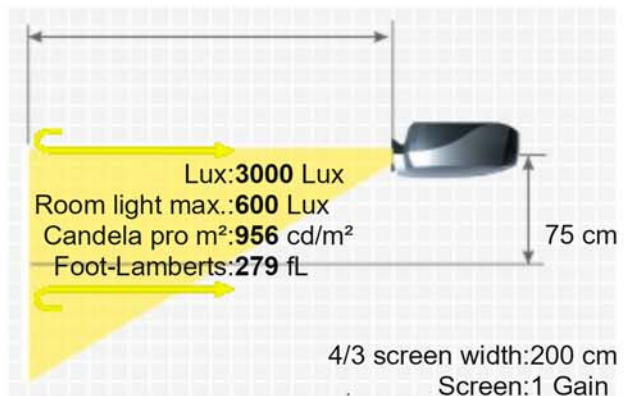

Shift: 75 cm

Weight 27,60 kg / 60,85 lbs.
 Keystone Vert.: +/-40°
 Illumination Hori.: +/-20°
 90%
 Frequenz H-sync: 15-120 kHz
 V-sync: 48-120 Hz
 Range max.: 230 MHz
 Foot-Lamberts 279 fL / max. 826 cm screen width
 956 cd/m²
 Features

- Full HD 1080P compatible
- Lens shift Funktion
- Freeze
- User logo
- Eco Mode
- Kensington Slot
- Gamma correction
- 24/7 continuous operation capable

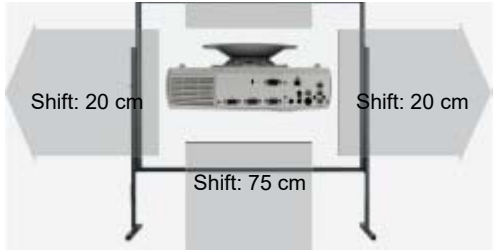

Bulb only NLMP18171
 Lamp ruby Ruby-LMP18171
 Lamp original 610-337-0262 / LMP104 / ET-SLMP104
 Compatible lamp LMP-K18170
 Universal Remote original Fernb-uni-V3
 Remote control original 6451024589 / CXZL
 Air filter original POA-FIL-180 / 610-335-9830 / ET-SFYL180
 Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n19378>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-32601 (W06)	1.22-1.55:1	2.4-3.1 m	+/-40%	+/-10%	Powered
AH-32581 (T03)	6.08-8.82:1	12.2-17.6 m	+/-40%	+/-10%	Powered
AH-32401 (W04)	1.55-2.03:1	3.1-4.1 m	+/-40%	+/-10%	Powered
AH-22051 (S03)	2.63-3.56:1	5.3-7.1 m	+/-40%	+/-10%	Powered
AH-21202 (W02Z)	1.42-1.84:1	2.8-3.7 m	+/-40%	+/-10%	Powered
AH-21102 (S02Z)	2.05-2.65:1	4.1-5.3 m	+/-50%	+/-10%	Powered
AH-21091 (T02)	4.29-6:1	8.6-12 m	+/-40%	+/-10%	Powered
AH-21022 (M01Z)	3.38-4.39:1	6.8-8.8 m	+/-40%	+/-10%	Powered
0001-4299	7.37-12.61:1	14.7-25.2 m	+/-40%		Manual
0001-4297	1.9-3.45:1	3.8-6.9 m	+/-40%		Manual
0001-4261	5-8.53:1	10-17.1 m	+/-40%		Manual
0001-4260	3.09-4.39:1	6.2-8.8 m	+/-40%		Manual
Fix Optional Lenses					
AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
AH-21012 (W01Z)	1.21:1	2.4 m	+/-40%	+/-10%	No Zoom
(T01Z)	7:1	14 m	+/-40%	+/-10%	No Zoom

Status 2008 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

<https://www.projector-database.com/pro/eikilcx7-en.html>