

Eiki LC XT5 / A

EIKI LC XT5 / A



Brief Introduction

Beta 2.5

The Eiki model LC XT5 / A is an LCD projector with XGA 1024 x 768 resolution and a contrast of 2000:1. With the lens shift function, the projector can be positioned very freely. The projector can illuminate a picture width of 1067 cm well. The projector can manage rooms with residual light with a smaller image width, we recommend a maximum of 711 cm here. Playing 1080P is also no problem for the projector. The projector was launched in 2007 and is no longer sold by the manufacturer, but is still very popular in our projector database.

Display Type



3 x 1,8" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

Projector 15000

Screen 5000 Lux (bei 200 cm Screen)

Contrast

2000:1 full on/off

2000:1 full on/off

Black Level

7,5000 min. Lumen

2,504 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10% motorisch max.

Resolution

XGA 1024 x 768

786.432 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Application

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

4 x 330W NSHA Lamp

Light Life

Articel Nr.: 610 334 6267

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

2 x 3W Stereo

Connections

1 x DVI-D (HDCP-kompatibel)

1 x D-Sub 15-pin (RGB analog)

5 x BNC (RGBHV / Video / Y, Cb / Pb, Cr / Pr)

1 x Mini DIN 4-pin (S-Video)

1 x D-Sub 9-pin (RS232 kompatibel)

1 x 3,5 mm Mini Jack (Fernbedienung)

1 x USB Typ B

Weitere Anschlüsse optional.

Ceiling Mounting

Yes




Power 1700W
Size WxHxD 581 x 252 x 816 mm (22,9"x9,9"x32,1") 119,47 L/dm³
Operating Noise 46dB

Weight 36,50 kg / 80,47 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°
Illumination 90%
Frequenz H-sync: 15-120 kHz
V-sync: 48-120 Hz
Range max.: 230 MHz
Foot-Lamberts 465 fL / max. 1067 cm screen width
1593 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion motorisch max.
- Freeze
- User logo
- Gamma correction
- 24/7 continuous operation capable
- Remote control with laser pointer
- Optional LAN network compatible.
- Digital Zoom
- 2-lamp and 4-lamp mode

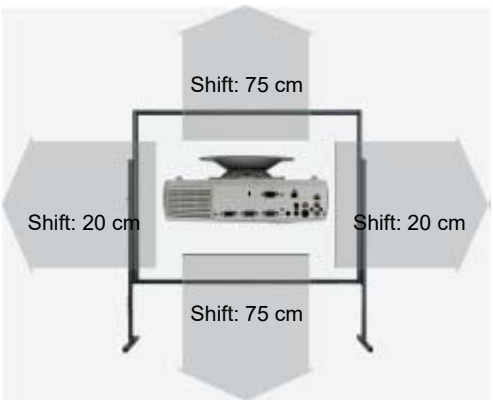

Optional

Bulb only NLMP17868

Lamp ruby Ruby-LMP17868

Lamp original 610-334-6267 / LMP109 / ET-SLMP109

Compatible lamp LMP-K17868

Alternative zu:610-334-1057

Remote control original 645 095 5549 / CXWK

Air filter original 610-334-1057

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n17869>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
AH-32601 (W06)	1.24-1.57:1	2.5-3.1 m	+/-40%	+/-10%	Powered
AH-32581 (T03)	6.12-8.89:1	12.2-17.8 m	+/-40%	+/-10%	Manual
AH-32401 (W04)	1.59-2.08:1	3.2-4.2 m	+/-40%	+/-10%	Powered
AH-22051 (S03)	2.63-3.56:1	5.3-7.1 m	+/-40%	+/-10%	Powered
AH-21202 (W02Z)	1.42-1.84:1	2.8-3.7 m	+/-40%	+/-10%	Powered
AH-21102 (S02Z)	2.05-2.65:1	4.1-5.3 m	+/-50%	+/-10%	Powered
AH-21091 (T02)	4.29-6:1	8.6-12 m	+/-40%	+/-10%	Powered
AH-21022 (M01Z)	3.38-4.39:1	6.8-8.8 m	+/-40%	+/-10%	Powered
0001-4299	7.37-12.61:1	14.7-25.2 m	+/-40%	+/-10%	Manual
0001-4297	1.9-3.45:1	3.8-6.9 m	+/-40%	+/-10%	Manual
0001-4261	5-8.53:1	10-17.1 m	+/-40%	+/-10%	Manual
0001-4260	3.09-5.32:1	6.2-10.6 m	+/-40%	+/-10%	Manual
Fix Optional Lenses					
AH-32021 (W03)	0.81:1	1.6 m	0.0% Fix		No Zoom
AH-21032 (T01Z)	6.89:1	13.8 m	+/-40%	+/-10%	No Zoom
AH-21012 (W01Z)	1.21:1	2.4 m	+/-40%	+/-10%	No Zoom

Status 2007 Discontinued (EOL) // Last update of the data: 2023-08-04

Data



Bild



HCinema

<https://www.projector-database.com/pro/eikilcxt5-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.