

Elmo EDP 6200



Brief Introduction

Beta 2.5

The standard portable EDP 6200 LCD has 1900 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 380 cm well thanks to its 1900 Ansi lumens. In room light, however, the image width should ideally be less than 253 cm. It is no longer offered by the manufacturer Elmo. It should also be noted that, unfortunately, there are no more replacement lamps for the projector, neither originals nor replicas.



3 x 1,3" psi LCD TFT Panel mit MLA
XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

1900

615 Lux (bei 203 cm Screen)

Contrast

250:1 full on/off

250:1 full on/off

Black Level

7,6000 min. Lumen

2.49 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W UHP Lamp

Articel Nr.: 9462

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,3

Objective

F=1,25-1,8 f=48,4-62,9 mm

Throw Ratio

1,83-2,38:1

Audio

1,5W Stereo

Connections

Cinch Video in
Stereo Cinch Eingang
Mini Jack in 2 xAus.
2 xD-sub 15pin in 1 xAus.
RS232 Port
S Video Eingang

Ceiling Mounting

-

Power

260W

Size WxHxD

275 x 143 x 382 mm (10,8"x5,6"x15") 15,02 L/dm³

Operating Noise

-

Weight

6,90 kg / 15,21 lbs.

Keystone


-

Illumination

-

Frequenz

-

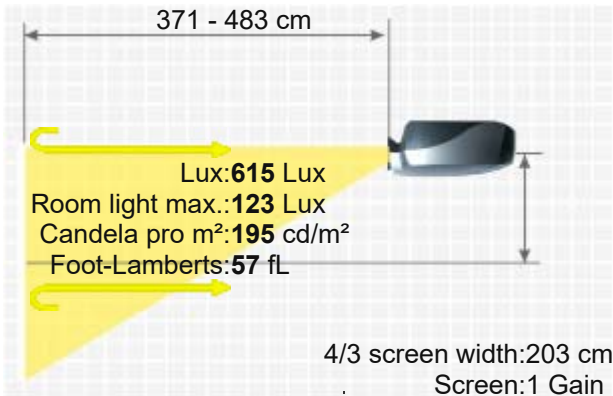

Foot-Lamberts

57 fL / max. 380 cm screen width

195 cd/m²

Features

Status

Data

■ Remote control with laser pointer

- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/elmoedp6200-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.