

Elmo iP 55E



ELMO iP 55E



Brief Introduction

Beta 2.5

A brief introduction to the Elmo iP 55E. The LCD projector has an XGA 1024 x 768 resolution and a contrast of 350:1. As the projector has horizontal and vertical keystone correction, the projector can be set up with plenty of free space in the room. Thanks to the brightness of 3000 Ansi lumens, a picture width of 477 cm is possible. With room lighting, the image should be max. 318 cm wide. The model built in 2008 is no longer offered by Elmo.



3 x 1,0" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Display Type

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

350:1 full on/off

350:1 full on/off

Black Level

8,5714 min. Lumen

2,882 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

UXGA 1600 x 1200 compressed

Video Modes

PAL, SECAM, NTSC,

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source

260W HPM Lamp

Articel Nr.: LMPf13832

Light Life

1500 h.

Operating Costs

-

Focus

Manual

Zoom

Manual 1,28

Objective

f=35,5-45,5 mm

Throw Ratio

1,75-2,24:1

Audio

1 x 1W

Connections

2 x D-sub 15pin in 1 x out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack
USB Typ B

Ceiling Mounting

-

Power

390W

Size WxHxD

400 x 145 x 315 mm (15,7"x5,7"x12,4") 18,27 L/dm³

Operating Noise

38 / 36 dB in Eco Mode

Weight

7,30 kg / 16,09 lbs.

Keystone

Vert.: +/-15°

Hori.: +/-10°



Illumination


-

Frequenz

H-sync: 21-80 kHz

V-sync: 50-85 Hz

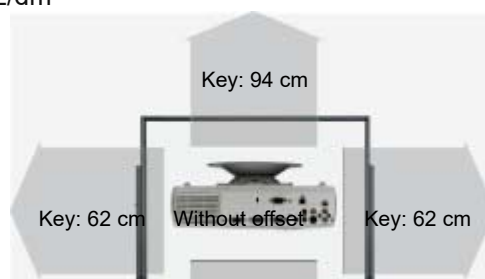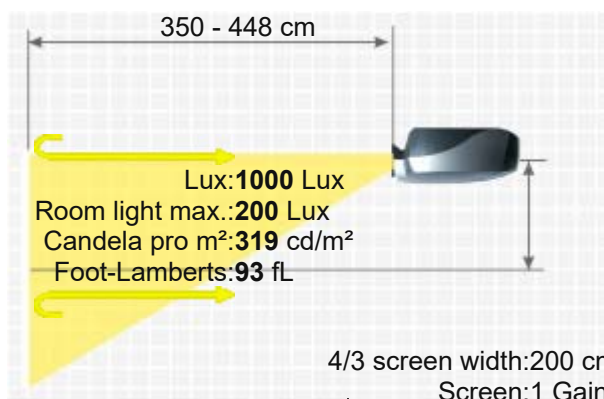

Foot-Lamberts	93 fL / max. 477 cm screen width	
	319 cd/m²	
Features	■ Eco Mode ■ Picture-in-Picture ■ CCD Camera ■ Digital Zoom	
Status Data	2008 Discontinued (EOL) // Last update of the data: 2023-08-04	
More Details	 HCinema https://www.projector-database.com/pro/elmoip55e-en.html	
Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.		