

Gateway Model 210



Brief Introduction

Beta 2.5

The standard portable Gateway Model 210 DLP projector has 1500 Ansi lumens, a contrast of 900:1 and an XGA 1024 x 768 resolution. Due to the brightness of 1500 Ansi lumens, a picture width of 337 cm is possible. In room light, the picture should be max. 225 cm wide. The model built in 2003 is no longer offered by Gateway.



1 x 0,7" DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

1500

485 Lux (bei 203 cm Screen)

Contrast

900:1 full on/off

900:1 full on/off

Black Level

1,6667 min. Lumen

0.541 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, NTSC 3,58, NTSC 4,43

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

150W P-VIP Lamp

Articel Nr.: LMP1626

Light Life

1500 h.

Operating Costs

21,43% / 0,09 €

Focus

Manual

Zoom

Manual 1,17

Objective

-

Throw Ratio

-

Audio

-

Connections

DVI in

D-sub 15 pin in

Cinch Video in

S-Video in

Ceiling Mounting

Yes

Power

220W

Size WxHxD

-

Operating Noise

-

Weight

1,58 kg / 3,48 lbs.

Keystone

-

Illumination


-

Frequenz

-

Foot-Lamberts

45 fL / max. 337 cm screen width
154 cd/m²

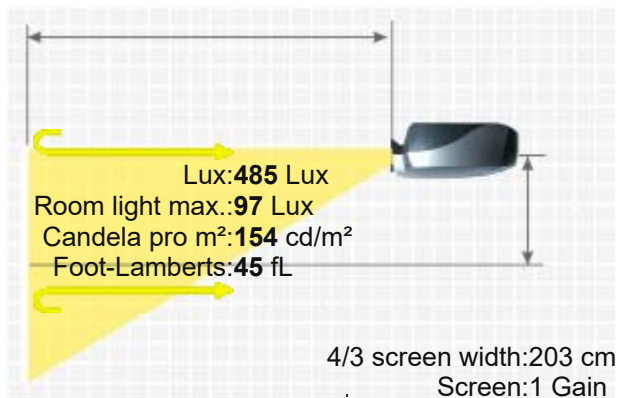

Features

- Freeze
- Kensington Slot
- Remote control with laser pointer

Optional

Bulb only	NLMP1626
Lamp ruby	Ruby-LMP1626
Lamp original	LMP1626

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n1626>
2003 Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/gatewaymodel210-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.