

GP Movin 2001



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Screen Mirroring

In Test

The GP Movin 2001 stationary LCD projector has 200 Ansi lumens and an SVGA 800 x 600 resolution. The manufacturer specifies a lamp life of 5000 hours, which is over 6.8 years if enjoyed for two hours a day. A picture width of up to 123 cm is possible. However, the picture should be smaller in room light. We recommend max. 82 cm. It is no longer offered by the manufacturer GP.



1 x LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

Projector
200
-
-

Screen
67 Lux (200 cm Screen width)
-
-

SVGA 800 x 600
480.000 Pixel
XGA 1024 x 768 compressed
NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

4 x 35W Lamp
ca 5000 h.

Manual

No Zoom

-

-

-

Scart-Buchse
FBAS
S-Video
RGB mit wählbaren Synchronisationen

Yes, is possible.

190W

-

-

-

-

-


-

6 fL / max. 123 cm screen width
21 cd/m²

-

-

-

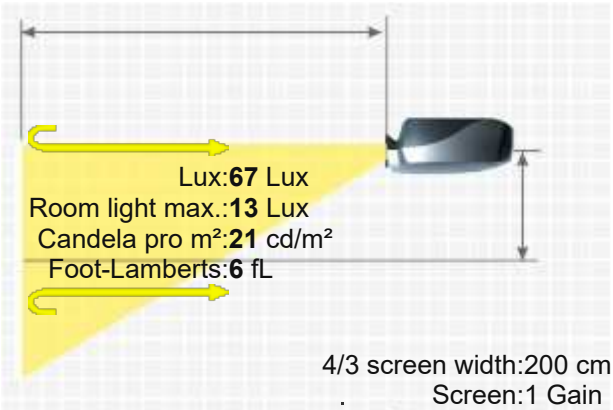

Optional accessories



Luftfilter universal

uni3mm

18,15 €

Status
Data

- Discontinued (EOL) // Last update of the data: 2026-06-09



HCinema

<https://www.projector-database.com/pro/gpmovin2001-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.