

# Hughes-JVC ILA 220



## Brief presentation

Beta 2.5

## Projection system

Ansi-Lumen

Contrast

Black value

Offset

Resolution

Playback signals

Area of application

Light source

Light lifetime

Operating costs

The focus

Zoom

Objective

Projection ratio

Audio

Connections

Ceiling mounting

Electricity consumption

Dimensions BxHxT

Operating noise

Weight

Keystone correction

illumination

frequency

Foot-Lamberts

Candela per m2

Equipment (extras)

Screen Mirroring

Year of construction

With the ILA 220, the manufacturer Hughes-JVC offers a stationary ILA projector with UXGA 1600 x 1200 resolution and a contrast of 200:1.

Due to the brightness of 1850 Ansi-Lumen, an image width of 375 cm is possible. In room light, the picture should be max. 250 cm wide. It is no longer offered by the manufacturer Hughes-JVC.

3 x D-ILA chip

UXGA 4/3

1850

200:1 full on/off

9,2500 min. Lumen

--

UXGA 1600 x 1200

1,920,000 pixels

PAL, SECAM, NTSC

Stationary | | Permanent installation in the training room and meeting room as well as conference room.

Small image width or rooms with very little room light under 100 lumens..

900W lamp

--

--

--

--

--

--

--

--

Yes

1600W

615 x 433 x 1264 mm (24,2"x17"x49,8") 336.6 L/dm3

--

120,00 kg / 264,55 lbs.

--

--

H-sync: 15-90 kHz

V-sync: 45-120 Hz

Bandwidth max.: 100 MHz

57 fL / max. 375 cm image width

199.5 cd/m2

■ Gamma correction

--


- // Last data change: 2023-08-04

Screen

617 Lux (with 200 cm canvas)

200:1 full on/off

3.131 min. Lumen

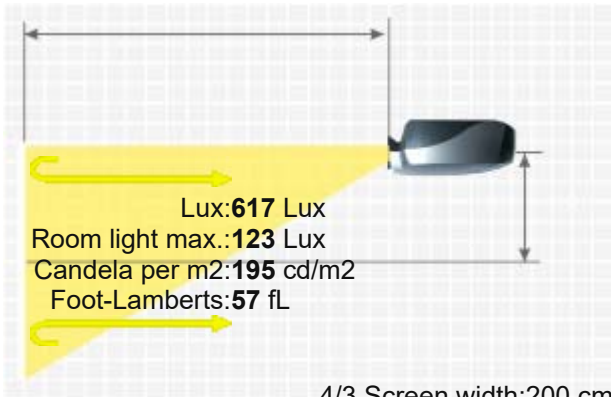

More details



# HCinema

<https://www.hcinema.de/pro/hughes-jvcila220.html>

Due to our constant commitment to the continuous improvement of the quality of our projector database, this brochure can be subjected to change even without prior notice. HCinema is not liable for any errors or omissions contained in the product descriptions.