


InFocus IN5009

INFOCUS IN5009



The InFocus IN5009 Stationary Laser LCD Projector has 10,000 ANSI lumens, a contrast ratio of 100,000:1, and a WUXGA 1920 x 1200 resolution. Thanks to the laser, it has a service life of 20,000 hours, which would be over 13.7 years if viewed for 4 hours a day. The lens shift function allows the projector to be set up very freely. An image width of up to 1016 cm is possible, as the projector has 10,000 ANSI lumens. The projector can handle rooms with residual light with a smaller image width; we would recommend a maximum of 677 cm. Furthermore, the projector can play 1080P and 4K (compressed) without any problems.

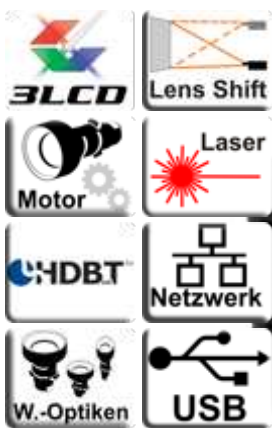

3 x 0,76" TFT LCD Panel
WUXGA 16/9 Liquid Crystal Display

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections


Ceiling Mounting

10000
100000:1
0,1000 min. Lumen
Vert.: +50% -10% Hori.: +/-20%
WUXGA 1920 x 1200
2.304.000 Pixel
UHD (4K+2K) 4096 x 2160 compressed
Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Very large screen width and rooms with plenty of light and shaded daylight.
Quantum Laser
20000 h.
0,00 € Laser

Projector

Screen

4444 Lux (200 cm Screen width)
100000:1
0,044 min. Lumen

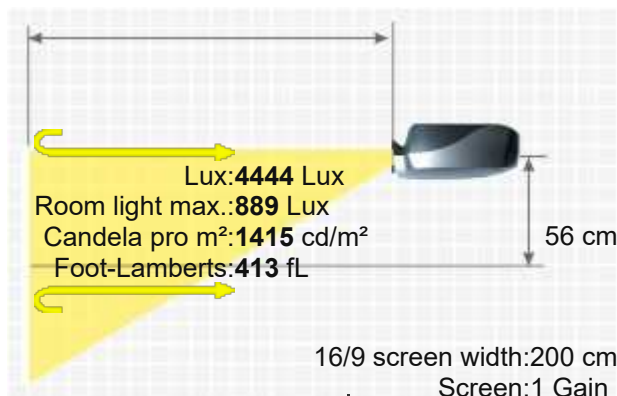


Power750W / 650W ECO 1 / 450W ECO 2
Size WxHxD600 x 218 x 503 mm (23,6"x8,6"x19,8") 65,79 L/dm³
Operating Noise35 / 32 dB in Eco Mode

Weight24,00 kg / 52,91 lbs.
KeystoneVert.: +/-30°
Hori.: +/-30°
Illumination80%
FrequenzH-sync: 15-100 kHz
V-sync: 24-85 Hz
Foot-Lamberts413 fL / max. 1016 cm screen width
1415 cd/m²
Features

- Full HD 1080P compatible
- Lens shift Funktion
- User logo
- Eco Mode
- Kensington Slot
- Lan network compatible.

Screen Mirroring-

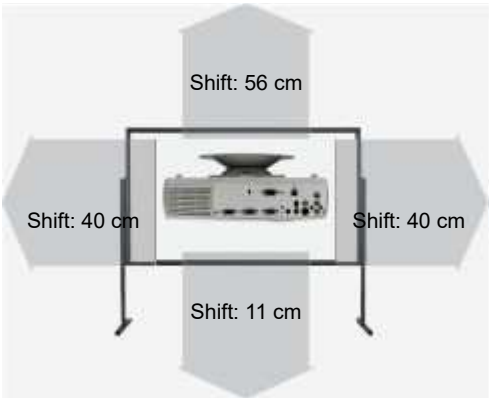

Optional Lenses						
Name	Ratio	Distance	Shift V	Shift H	Zoom	
LENS-113	4.59-7.02:1	918-1404 m			Powered	
LENS-114	2.99-5.93:1	598-1186 m			Powered	
LENS-111	1.46-2.95:1	292-590 m			Powered	
LENS-112	0.79-1.11:1	158-222 m			Powered	

Status2025 Current model // Last update of the data: 2025-12-05
Data

More Details



HCinema

<https://www.projector-database.com/pro/infocusin5009-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.