



InFocus Nemesis II IN1026SL

INFOCUS NEMESIS II IN1026SL




Display Type	 1 x 0,65" DLP Chip  WXGA 16/10 Ti Digital Light Processing Chip	
Ansi-Lumen	5000	2000 Lux (bei 200 cm Screen)
Contrast	400000:1	400000:1
Black Level Offset	0,0125 min. Lumen	0,005 min. Lumen
Resolution	WXGA 1280 x 800 1.024.000 Pixel WUXGA 1920 x 1200 compressed	
Video Modes	Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p	
Application	Standard-Portabel External training and company presentations, as well as product presentations.	
Light Source	Quantum Laser	
Light Life	30000 h.	
Operating Costs	0,00 € Laser	
Focus	Manual	
Zoom	Manual x1,6	
Objective	F=2,5-3,26 f=20,91-32,62 mm	
Throw Ratio	1,47-2,35:1	
Audio	1 x 15W	
Connections	2x HDMI 1.4 in D-sub 15pin in Mini Jack Audio in und out USB-A in RS232C Din 9 pin in RJ45 in	

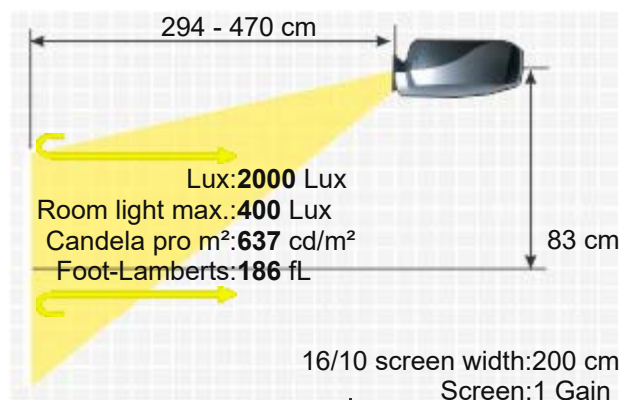



Ceiling Mounting Yes
 Power 195W / 145W Eco
 Size WxHxD 278 x 116 x 216 mm (10,9"x4,6"x8,5") 6,97 L/dm³
 Operating Noise 32 / 26 dB in Eco Mode

Weight 3,10 kg / 6,61 lbs.
 Keystone Vert.: +/-30°
 Hori.: +/-30°
 Illumination 85%
 Frequenz H-sync: 15-100 kHz
 V-sync: 24-120 Hz
 Foot-Lamberts 186 fL / max. 718 cm screen width
 637 cd/m²
 Features
 ■ Full HD 1080P compatible
 ■ Eco Mode
 ■ Kensington Slot
 ■ 360° installable
 ■ 24/7 continuous operation capable
 ■ Password protection
 ■ Wi-Fi network compatible.
 ■ Lan network compatible.
 ■ Crestron®-Software compatible.
 ■ 4P Keystone
 Status 2024 Current model // Last update of the data: 2024-10-24

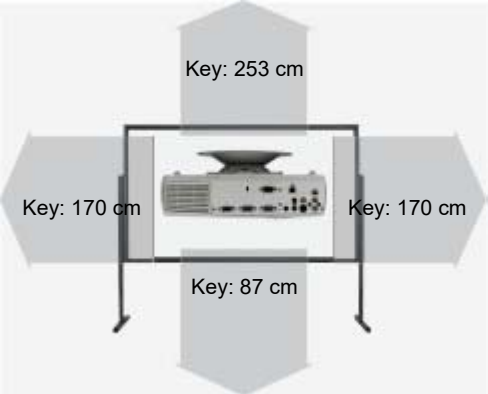

HCinema

<https://www.projector-database.com/pro/infocusnemesisiin1026sl-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.