

Innovision AX5350

INNOVISION AX5350



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The standard portable AX5350 LCD projector from Innovision has 3500 Ansi lumens, a contrast of 800:1 and an XGA 1024 x 768 resolution. A built-in horizontal and vertical keystone correction provides freedom when positioning the projector. Thanks to the brightness of 3500 Ansi lumens, an image width of 515 cm is possible. The projector can also handle slightly brighter rooms with a smaller picture width (we recommend max. 343 cm). The model built in 2005 is no longer offered by Innovision.



3 x 0,79" LCD TFT Panel

XGA 4/3 Liquid Crystal Display

Projector

3500

800:1 full on/off

4,3750 min. Lumen

Screen

1167 Lux (bei 200 cm Screen)

800:1 full on/off

1,464 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

250W Lamp

3000 h. 5000 Srd in Eco Mode

-

Manual

Manual 1,19

F=1,7-1,94 f=26-31 mm

1,62-1,93:1

1 x 2W

D-sub 15pin in

Cinch Video in

S-Video in

Mini Jack

RS232C

Yes

-

297 x 81 x 229 mm (11,7"x3,2"x9") 5,51 L/dm³

33dB

2,90 kg / 6,39 lbs.



Vert.: +/-15°

Hori.: +/-15°

-


-

108 fL / max. 515 cm screen width

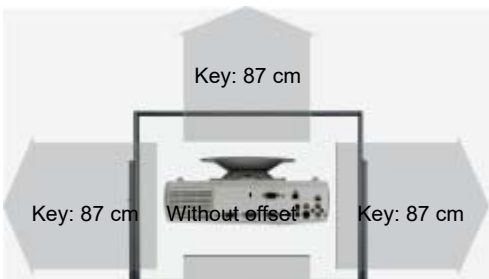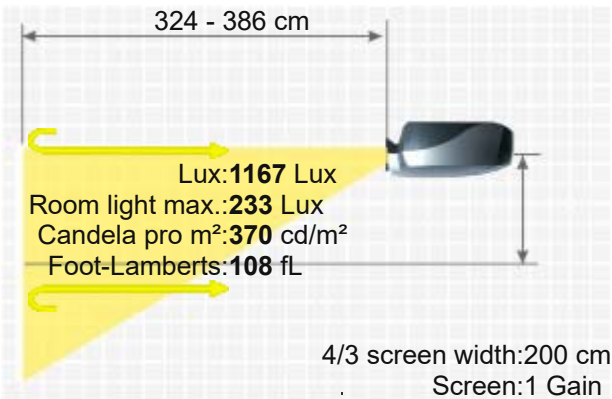

370 cd/m²

Key: 87 cm



- Freeze
- Eco Mode
- Picture-in-Picture
- Remote control with mouse control

Features

Please note
Status
Data

Die Lampe hat 250W der Projektor nur 230W verbrauch laut Prospekt, das kann nicht stimmen.
2005 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details

HCinema

<https://www.projector-database.com/pro/innovisionax5350-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.