

JAVES OLX 730

JAVES OLX 730



Brief Introduction

Beta 2.5

The OLX 730 LCD projector from JAVES has 3000 Ansi lumens, a contrast of 1000:1 and an XGA 1024 x 768 resolution. 3000 Ansi lumens ensure that a picture width of 477 cm is also possible. However, if room light is available, the picture should be max. 318 cm wide. Even 1080P video signals are no problem for the projector. The projector is no longer sold by the manufacturer.

Display Type

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

3000

1000 Lux (bei 200 cm Screen)

Contrast

1000:1 full on/off

1000:1 full on/off

Black Level

3,0000 min. Lumen

1,003 min. Lumen

Offset

-

Resolution

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

Video Modes

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Light Source

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Life

200W UHP Lamp

-

Operating Costs

-

Focus

Manual

Zoom

Manual 1,2

Objective

f=18,6-22,3 mm

Throw Ratio

1,31-1,57:1

Audio

1 x 2W Mono

Connections

M1-DA (DVI) in
D-sub 15 pin in und out
S-Video in
Cinch Video in
Cinch Stereo in
RS232C
Mini Jack Audio in und out

Ceiling Mounting

-

Power


-

Size WxHxD

308 x 92 x 233 mm (12,1"x3,6"x9,2") 6,6 L/dm³

Operating Noise

36dB

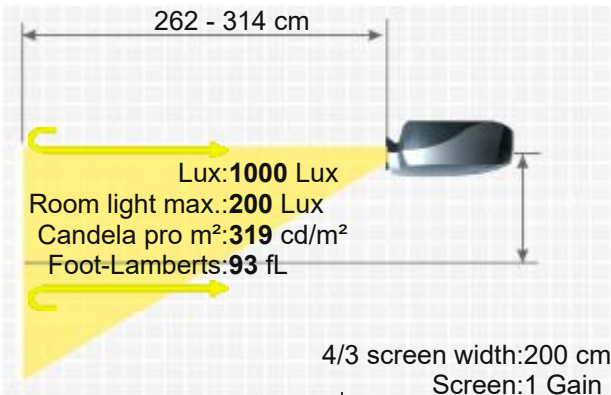

Key: 122 cm

Weight 2,80 kg / 6,17 lbs.
Keystone Vert.: +/-25°
Illumination -
Frequenz H-sync: 10-150 kHz
V-sync: 50-150 Hz
Foot-Lamberts 93 fL / max. 477 cm screen width
319 cd/m²
Features ■ Full HD 1080P compatible
■ Freeze
Status - Discontinued (EOL) // Last update of the data: 2023-08-04



Data



More Details



HCinema

<https://www.projector-database.com/pro/javesolx730-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.