

Kindermann KX 1000/A/B



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

Size WxHxD

Operating Noise

The Kindermann KX 1000/A/B LCD projector has 1600 Ansi lumens, a contrast of 200:1 and an XGA 1024 x 768 resolution. A picture width of up to 348 cm is possible as the projector has 1600 Ansi lumens. However, if room light is available, the picture should be max. 232 cm wide. This model is no longer offered by Kindermann.

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1600
200:1 full on/off
8,0000 min. Lumen
518 Lux (bei 203 cm Screen)
200:1 full on/off
2.63 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
NTSC, PAL, SECAM Pal 60 NTSC 4,43
Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

150W UHE Lamp
Articel Nr.: Ruby-LMPf13709
2000 h.

Powered

Powered

-

-

-

Cinch Video in
D-sub 15pin in 1 xAus.
RS232 Port
S Video Eingang

Yes

-

275 x 140 x 360 mm (10,8"x5,5"x14,2") 13,86 L/dm³

-


5,30 kg / 11,68 lbs.

-

85%

H-sync: 15-80 kHz
V-sync: 50-85 Hz
Range max.: 80 MHz

48 fL / max. 348 cm screen width

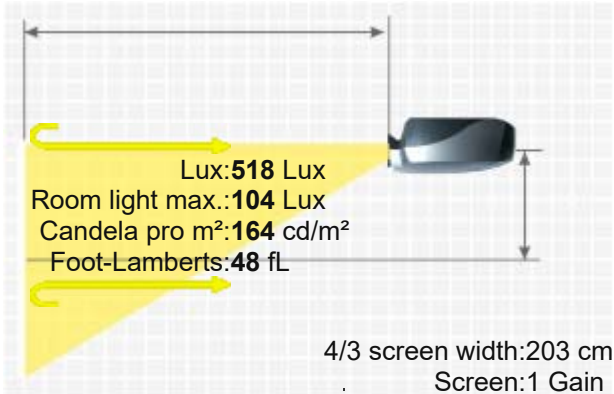

KINDERMANN KX 1000/A/B

164 cd/m²

Features

-
Bulb only NLMPf2593

Optional

Lamp original 5851

Status
Data

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=nf2593>
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/kindermannkx1000-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.