

Lightware VP800



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The Lightware VP800 standard portable LCD projector has 270 Ansi lumens, a contrast of 150:1 and an SVGA 800 x 600 resolution. The projector can illuminate a picture width of 143 cm well. However, if room light is available, the picture width should ideally not exceed 95 cm. On the market since 1996, the model is no longer offered by the manufacturer Lightware. It should also be noted that, unfortunately, there are no longer any replacement lamps available for the projector, neither originals nor replicas.



1 x 6,4" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

270
150:1 full on/off
1,8000 min. Lumen

87 Lux (bei 203 cm Screen)
150:1 full on/off
0.592 min. Lumen

SVGA 800 x 600
480.000 Pixel

NTSC, PAL, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

400W Halogen Lamp

Articel Nr.: LA801

300 h.

-

Manual

No Zoom 1,13

f=206-232 mm

1,58-1,78:1

2 x 3W

2 x Cinch Stereo in 1 x out
1 x Cinch Video in
S-Video in
D-sub 15pin in

Nein

340W

260 x 320 x 160 mm (10,2"x12,6"x6,3") 13,31 L/dm³

-

4,20 kg / 9,26 lbs.

-

-


H-sync: 24,0-50,0 kHz
V-sync: 55-75 Hz

8 fL / max. 143 cm screen width
27 cd/m²

-

1996 Discontinued (EOL) // Last update of the data: 2023-08-04

Data

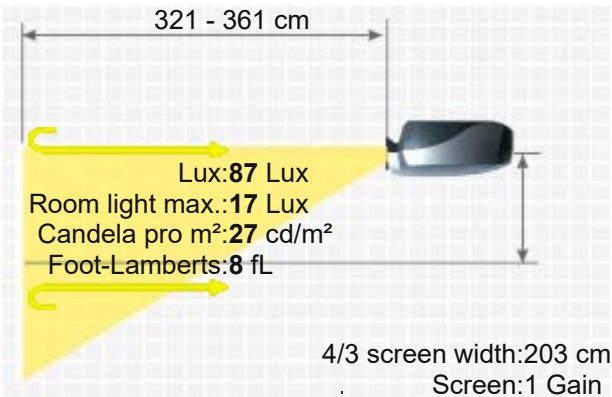



HCinema

<https://www.projector-database.com/pro/lightwaremvp800-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.