


## The Ultimate Gaming Projector

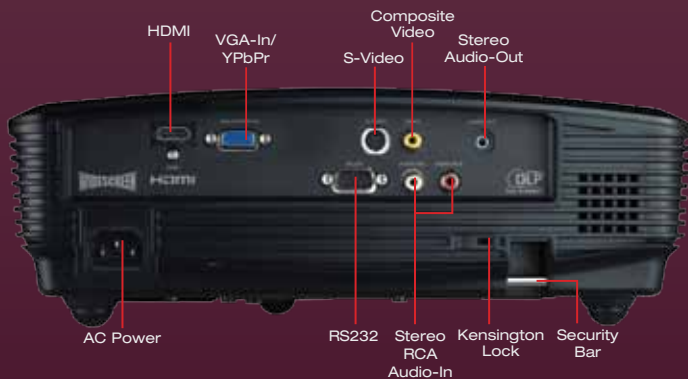

Enjoy the ultimate in widescreen entertainment with Optoma's GT720 Gaming projector. Designed for flawless performance with today's top HD consoles and gaming PCs, the GT720 energizes games with stunning speed, high contrast and vivid colors. Widescreen display provides cinema-sized fun with a whopping 300" maximum screen size. The portable GT720 comes with its own backpack for on-the-go gaming convenience.

3D content can be viewed with active LCD shutter glasses when the projector is connected to a computer with a compatible 3D graphics card. Please visit [www.optoma.com](http://www.optoma.com) for more information.

### GT720 FEATURES

- ❑ Bright at 2500 ANSI lumens with a high contrast ratio of 3000:1
- ❑ Projects a 150" diagonal image less than eight feet away
- ❑ Supports resolutions up to 1080p
- ❑ Powerful audio – built-in 10-watt speaker system
- ❑ Flexible connections – HDMI, VGA, S-video, Composite, Stereo RCA Audio-in, Stereo Audio-out & RS-232

# GT720 | Multimedia Projector

## GameTime Nylon Backpack Included



## Projection Distance/Image Size

| Projection Distance (Feet) | Diagonal (Inches) |
|----------------------------|-------------------|
| 5                          | 98                |
| 6                          | 118               |
| 7                          | 138               |
| 8                          | 157               |
| 9                          | 177               |
| 10                         | 197               |
| 11                         | 216               |

## Control Panel



## Optional Accessories

|                                               |             |
|-----------------------------------------------|-------------|
| Lamp:                                         | BL-FP180E   |
| Remote Control:                               | BR-3052N    |
| Backpack:                                     | BK-4029     |
| Power Cord (1m):                              | BC-PUPIXY01 |
| Power Cord (11m):                             | BC-PUPIXY11 |
| HDMI Cable (7.5m):                            | BC-HMHMXX08 |
| Composite Cable (1.8m):                       | BC-COCOXX02 |
| VGA Cable (1.8m):                             | BC-VGVGXX02 |
| VGA Cable (5m):                               | BC-VGVGXX05 |
| Component to VGA Adapter Cable:               | BC-VGCRXY00 |
| Ceiling Mount:                                | BM-5001U    |
| 92" Matte White 16:9 Manual Pull-Down Screen: | DS-9092PMG+ |

## Specifications

|                           |                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Display Technology:       | Single 0.65" DC3 DMD DLP® Technology by Texas Instruments                                                                                                             |
| Resolution:               | Native WXGA (1280 x 800)                                                                                                                                              |
| Maximum Resolution:       | UXGA (1600 x 1200), 1080p                                                                                                                                             |
| Brightness (Typical):     | 2500 ANSI Lumens                                                                                                                                                      |
| Contrast Ratio:           | 3000:1 (Full On/Full Off)                                                                                                                                             |
| Lamp Type:                | 180W P-VIP                                                                                                                                                            |
| Lamp Life (STD/Bright)*:  | Estimated at 5000/3000 Hours                                                                                                                                          |
| Throw Ratio:              | 0.72:1 (Distance/Width)                                                                                                                                               |
| Image Size (Diagonal):    | 34" to 300" (0.5 to 5.5 m)                                                                                                                                            |
| Projection Distance:      | 1.64' to 18.0' (0.5 to 5.5 m)                                                                                                                                         |
| Noise Level (STD/Bright): | 28dB/30dB                                                                                                                                                             |
| Remote Control:           | IR Remote Control                                                                                                                                                     |
| Computer Compatibility:   | UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible                                                                                    |
| Video Compatibility:      | NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p)                                                                                                      |
| 3D Compatibility:         | 120Hz Frame Sequential 3D for Resolutions Up to 720p, 60Hz Field Sequential 3D for Resolutions Up to 480i                                                             |
| Aspect Ratio:             | 16:10 Native, 16:9 & 4:3 Compatible                                                                                                                                   |
| Projection Lens:          | F=2.55, f=10.19                                                                                                                                                       |
| Offset:                   | 115%                                                                                                                                                                  |
| User Controls:            | Complete On-Screen Menu Adjustments in 20 Languages                                                                                                                   |
| Audio:                    | Two 5-Watt Stereo Speakers                                                                                                                                            |
| Keystone Correction:      | ± 15° Vertical                                                                                                                                                        |
| Vertical Refresh Rate:    | 24 to 120 Hz                                                                                                                                                          |
| Horizontal Scan Rate:     | 15 to 91 KHz                                                                                                                                                          |
| Power Supply:             | AC Input 100-240V, 50-60 Hz, Auto-Switching                                                                                                                           |
| Power Consumption:        | 255 Watts Max (Bright), 233 Watts (STD) <1 Watt (Standby)                                                                                                             |
| Weight:                   | 6.5 lbs (2.95 kg)                                                                                                                                                     |
| Dimensions (W x H x D):   | 12.76" x 3.82" x 9.21" (324 x 97 x 234 mm)                                                                                                                            |
| Operating Temperature:    | 41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application                                                                       |
| Displayable Colors:       | 1.07 Billion                                                                                                                                                          |
| Projection Method:        | Front, Rear, Ceiling Mount, Table Top                                                                                                                                 |
| Uniformity:               | 85%                                                                                                                                                                   |
| Security:                 | Kensington® Lock, Keypad Lock and Security Bar                                                                                                                        |
| I/O Connectors:           | HDMI, VGA-In, S-Video, Composite Video, Stereo RCA Audio-In, Stereo Audio-Out, and RS-232                                                                             |
| Standard Accessories:     | AC Power Cord, Backpack, VGA Component Adapter, Remote Control, Batteries for Remote, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card |
| Optional Accessories:     | Carrying Case, Ceiling Mount, VGA Cable, Composite Video Cable, and Panoview™ Series Screens                                                                          |
| Warranty:                 | 1 Year Limited Parts and Labor, 90 Days on Lamp                                                                                                                       |
| UPC:                      | 796435 81 116 7                                                                                                                                                       |

[www.optoma.com](http://www.optoma.com)

\*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness may decrease over time.



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.