

Optoma UHD3500A

OPTOMA UHD3500A



A brief introduction to the Optoma UHD3500A. The standard portable DLP projector has a UHD (4K2K) 3840 x 2160 resolution and a contrast of 1400000:1. The lamp life is up to 10000 hours, which is over 13.7 years with a daily viewing time of 2 hours. The integrated media player allows files to be played directly. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 3600 Ansi lumens, a picture width of 610 cm is possible. The projector can also handle slightly brighter rooms with a narrower picture width (we recommend max. 407 cm). Playback of 1080P and 4K as well as 3D is also no problem for the projector, meaning that all Blu-ray formats currently on offer can be recognized by the projector. At 28 decibels, the projector is very quiet compared to other projectors.



1 x DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Projector 3600
1400000:1 full on/off
0,0026 min. Lumen
Vert.: +65% --55%

Screen 1600 Lux (bei 200 cm Screen)
1400000:1 full on/off
0,001 min. Lumen

Resolution UHD (4K2K) 3840 x 2160
8.294.400 Pixel / FHD E-Shift

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD, 3D, EDTV 480p, 576p

Media player formats: Unterstützte Dateiformate MOV Jpeg / Jpg PNG BMP PowerPoint Word Excel PDF 3GP AVI MKV FLV MP4 MOV 3GP MPEG-Transport-Stream (.ts /.trp /.tp) ASF WMV AVI MKV MP4 MOV MPEG-Transport-Stream (.ts /.trp /.tp) MKV MPEG-Programm-Stream (.DAT /.VOB /.MPG /.MPEG) MPEG-Transport-Stream (.ts /.trp /.tp) MP4 AVI MKV MP4 MOV 3GP AVI MKV AVI MP4 MOV MP4 WMV

3D Compatibility Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom
Frame Sequential (3D Ready)

Application Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

Light Source 240W Lamp

Articel Nr.: BR-3071N / BT16063

Light Life 4000 h. / 10000 h. ECO

Operating Costs 2,38% / 0,01 €


Focus Manual

Zoom Manual 1,31

Objective f=12,81-16,74 mm

Throw Ratio 1,21-1,59:1

Audio 1 x 10W

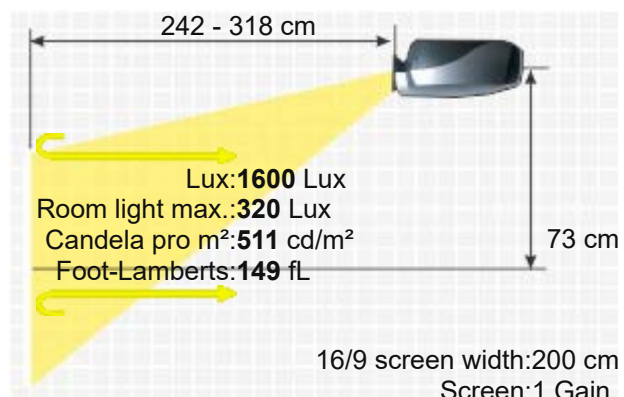

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

2 x HDMI 2.0 in
D-sub 15pin in
Mini Jack Audio in und out
USB Typ A in
RS232C Din 9 pin in
RJ45 in
1 x S/PDIF
12V Trigger

Connections




Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes
320 / 220W in Eco Mode
315 x 118 x 270 mm (12,4"x4,6"x10,6") 10,04 L/dm³
28 / 26 dB in Eco Mode

Weight
Keystone
Illumination
Frequenz
Foot-Lamberts

3,90 kg / 6,61 lbs.
Vert.: +/-40°
Hori.: +/-40°
75%
H-sync: 31-135 kHz
V-sync: 24-120 Hz
149 fL / max. 610 cm screen width
511 cd/m²

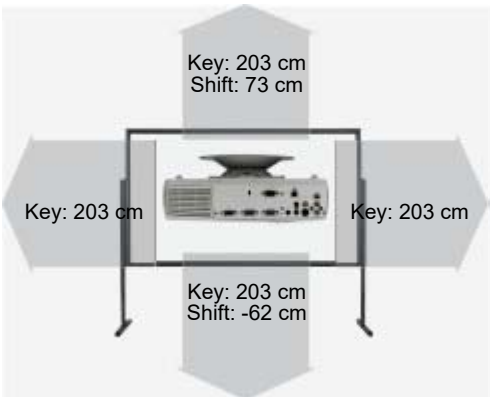

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Integrated Mediaplayer
- Eco Mode
- Kensington Slot
- High Dynamic Range (HDR)
- Optional Wi-Fi network compatible.
- Lan network compatible.

Optional

Remote control original BR-3071N / BT16063
Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro9002774>

Status

2022 Discontinued (EOL) // Last update of the data: 2023-08-30

Data



More Details



HCinema

<https://www.projector-database.com/pro/optomauhd3500a-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.