

Panasonic PT EX610 /L



The stationary PT EX610 /L LCD has 6200 Ansi lumens, a contrast of 5000:1 and an XGA 1024 x 768 resolution. The lamp in the projector is specified with a lamp life of 4000 hours, which is over 5.5 years if enjoyed for two hours every day. The built-in lens shift and keystone correction function provides freedom when setting up. An image width of up to 686 cm is possible as the projector has 6200 Ansi lumens. The projector creates rooms with residual light with a smaller image width, max. 457 cm is recommended. It is also Full HD 1080P compatible. The projector was launched in 2014 and is no longer sold by the manufacturer.

Brief Introduction

Display Type

3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Ansi-Lumen

6200

2067 Lux (bei 200 cm Screen)

Contrast

5000:1 full on/off

5000:1 full on/off

Black Level

1,2400 min. Lumen

0,414 min. Lumen

Lens shift

Vert.: +/-50% Hori.: +/-10%

Resolution

XGA 1024 x 768
786.432 Pixel

Video Modes

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationär | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

335W UHM Lamp
Articel Nr.: ET-LAE300

Light Life

4000 h. 4500 h. in Eco Mode

Operating Costs

3,05% / 0,1 €

Focus

Powered

Zoom

Powered 1,69

Objective

F=1,7-2,3 f=26,9-45,4 mm / L optional

Throw Ratio

1,7-2,8:1

Audio

10W

Connections

HDMI in
DVI-D mit HDCP in
D-sub 15pin in
5 x BNC RGBHV in
Mini Jack Audio in und out
RS232C Din 9 pin in
RJ45 mit HDBaseT in

Ceiling Mounting

Yes

Power

575W

Size WxHxD

530 x 177 x 445 mm (20,9"x7"x17,5") 41,75 L/dm³

Operating Noise

35 / 29 dB in Eco Mode

Weight


10,60 kg / 23,37 lbs.

Keystone

Vert.: +/-40°
Hori.: +/-30°

Illumination

90%

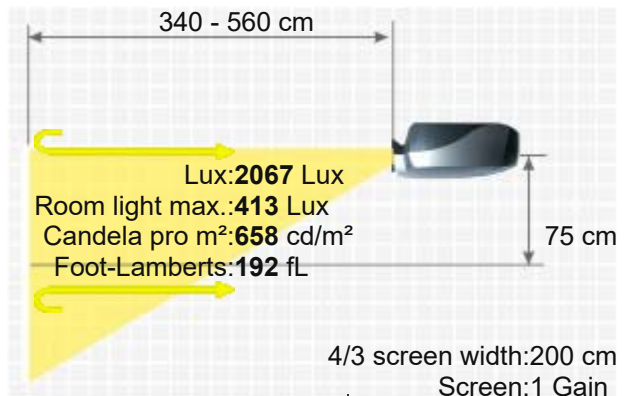

Frequenz
H-sync: 15-91 kHz
V-sync: 24-120 Hz
Range max.: 162 MHz

Foot-Lamberts
192 fL / max. 686 cm screen width

658 cd/m²

- Features
- Full HD 1080P compatible
 - Direkt Power Off
 - Lens shift Funktion
 - Eco Mode
 - Dynamic iris
 - PJLink™
 - Lan network compatible.
 - Crestron®-Software compatible.
 - Picture-in-picture
 - DICOM simulation

Optional

Remote control original	N2QAYA000063 / N2QAYA000105 / N2QAYA000158
Air filter original	ET-RFE300
Ceiling bracket original	ET-PKD120S
Ceiling bracket original	ET-PKD120H
Lamp original	ET-LAE300
Object lens original	ET-ELW21 / LNS-W21
Object lens original	ET-ELW20 / LNS-W20
Object lens original	ET-ELT21 / LNS-T21
Object lens original	ET-ELT20 / LNS-T20

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=fro22656>

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
ET-ELW21	0.8-1:1	1.6-2 m			
ET-ELW20	1.3-1.7:1	2.6-3.4 m	+/-50%	+/-10%	Powered
ET-ELT21	4.6-7.2:1	9.2-14.4 m	+/-50%	+/-10%	Powered
ET-ELT20	2.8-4.6:1	5.6-9.2 m	+/-50%	+/-10%	Powered

Status
2014 Discontinued (EOL) // Last update of the data: 2023-08-04
Data
Created: 2014-02-05 16:45:30

More Details



HCinema

<https://www.projector-database.com/pro/panasonicptex610l-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

