


# Panasonic PT-RZ17K

PANASONIC PT-RZ17K

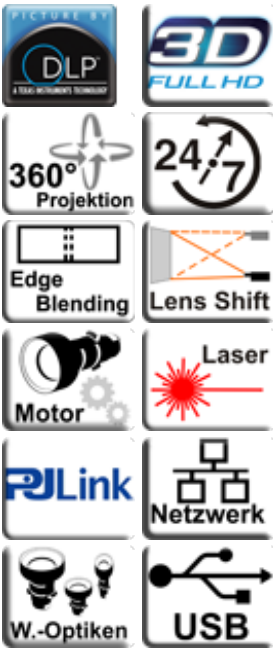

Top

## Brief Introduction

Beta 2.5

## Display Type

### Ansi-Lumen

### Contrast

### Black Level

### Lens shift

## Resolution

## Video Modes

## 3D Compatibility

## Application

## Light Source

## Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

With the PT-RZ17K, manufacturer Panasonic offers a large-size DLP laser projector with WUXGA 1920 x 1200 resolution and a contrast of 20000:1. The manufacturer Panasonic specifies a service life of 20000 hours, which is over 13.7 years with a daily viewing time of 4 hours. With the lens shift function, the projector can be positioned very freely. The projector can illuminate an image width of up to 1285 cm thanks to its 16000 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 857 cm. If the image is still too small, the integrated edge blending software can help to project a larger image with additional projectors. Video signals 1080P and 4K (compressed) as well as 3D are also no problem for the projector, which means that all Blu-ray formats currently available can be recognized by the projector.



3 x 0,8" DLP Chip

WUXGA 16/9 Ti Digital Light Processing Chip

Projector

16000

20000:1 full on/off

0,8000 min. Lumen

Vert.: +/-66% Hori.: +/-20%

WUXGA 1920 x 1200

2.304.000 Pixel

UHD (4K+2K) 4096 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Laser diode

20000 h.

0,00 € Laser

Powered

Powered

optional

optional


Nein

Screen

7111 Lux (bei 200 cm Screen)

20000:1 full on/off

0,356 min. Lumen

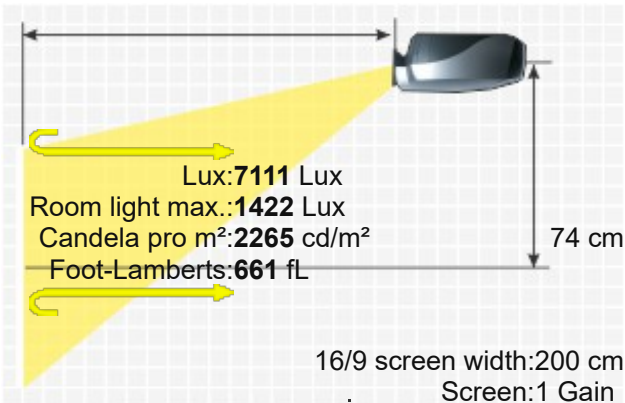

|                  |                                                                                                                                                       |
|------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Connections      | 2 x HDMI in<br>1 x DisplayPort in<br>5 x BNC RGBHV in<br>RS232C in und out<br>SYNC IN und out<br>USB Typ A<br>RJ45 in<br>Weitere Anschlüsse optional. |
| Ceiling Mounting | Yes, is possible.                                                                                                                                     |
| Power            | 1130 / 890W in Eco Mode                                                                                                                               |
| Size WxHxD       | 550 x 220 x 570 mm (21,7"x8,7"x22,4") 68,97 L/dm³                                                                                                     |
| Operating Noise  | 46 / 43 dB in Eco Mode                                                                                                                                |


|              |                                |
|--------------|--------------------------------|
| Weight       | 35,00 kg / 77,16 lbs.          |
| Keystone     | Vert.: +/-45°<br>Hori.: +/-40° |
| Illumination | 90%                            |

Frequenz -

|               |                                                  |
|---------------|--------------------------------------------------|
| Foot-Lamberts | 661 fL / max. 1285 cm screen width<br>2265 cd/m² |
|---------------|--------------------------------------------------|

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- DIGITAL LINK
- NFC via ET-NUK10 optional.

Screen Mirroring -

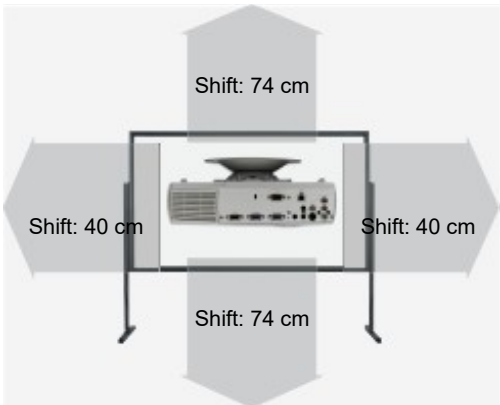

| Optional accessories                                                               |                        |                             |             |
|------------------------------------------------------------------------------------|------------------------|-----------------------------|-------------|
|  | Fernbedienung Original | N2QAYB001052 / N2QAYB001176 | 107,64 €    |
|   | Objektiv Original      | ET-D75LE8                   | 11.301,03 € |
|   | Objektiv Original      | ET-D75LE6                   | EOL €       |
|   | Objektiv Original      | ET-D75LE50                  | 6.703,67 €  |
|   | Objektiv Original      | ET-D75LE40                  | 5.273,78 €  |
|   | Objektiv Original      | ET-D75LE30                  | 3.991,38 €  |
|  | Objektiv Original      | ET-D75LE20                  | 3.711,02 €  |
|   | Objektiv Original      | ET-D75LE10                  | 5.273,02 €  |
|  | Objektiv Original      | ET-D3LEW60                  | 11.698,33 € |
|  | Objektiv Original      | ET-D3LEW50                  | 6.317,58 €  |
|   | Objektiv Original      | ET-D3LEW200                 | EOL €       |
|   | Objektiv Original      | ET-D3LEU100                 | 48.774,98 € |
|  | Objektiv Original      | ET-D3LET80                  | 16.202,38 € |
|                                                                                    | Objektiv Original      | ET-D3LET40                  | 10.304,21 € |



Objektiv Original

ET-D3LET30

7.301,51 €



Objektiv Original

ET-D3LES20

4.760,00 €

Deckenhalterung 220

Halterung45

83,60 €

### Optional Lenses

| Name | Ratio | Distance | Shift V | Shift H | Zoom |
|------|-------|----------|---------|---------|------|
|------|-------|----------|---------|---------|------|

### Zoom Optional Lenses

|             |             |             |         |        |         |
|-------------|-------------|-------------|---------|--------|---------|
| ET-D75LE8   | 7.8-13.8:1  | 15.6-27.6 m | +/-66%  | +/-24% | Powered |
| ET-D75LE6   | 0.9-1.1:1   | 1.8-2.2 m   | +/-44%  | +/-15% | Powered |
| ET-D75LE40  | 4.6-7.4:1   | 9.2-14.8 m  | +/-66%  | +/-24% | Powered |
| ET-D75LE30  | 2.4-4.7:1   | 4.8-9.4 m   | +/-66%  | +/-24% | Powered |
| ET-D75LE20  | 1.7-2.4:1   | 3.4-4.8 m   | +/-66%  | +/-24% | Powered |
| ET-D75LE10  | 1.3-1.7:1   | 2.6-3.4 m   | +/-66%  | +/-24% | Powered |
| ET-D3LEW60  | 0.92-1.1:1  | 1.8-2.2 m   | 52% Fix |        | Powered |
| ET-D3LEW201 | 0.65-0.85:1 | 1.3-1.7 m   | +/-57%  | +/-18% | Powered |
| ET-D3LEW200 | 0.65-0.85:1 | 1.3-1.7 m   | +/-57%  | +/-18% | Powered |
| ET-D3LET80  | 7.34-13.8:1 | 14.7-27.6 m |         |        | Powered |
| ET-D3LET40  | 4.61-7.41:1 | 9.2-14.8 m  | +/-66%  | +/-24% | Powered |
| ET-D3LET30  | 2.4-4.66:1  | 4.8-9.3 m   | +/-66%  | +/-24% | Powered |
| ET-D3LES20  | 1.67-2.41:1 | 3.3-4.8 m   |         |        |         |

### Fix Optional Lenses

|             |        |       |         |       |         |
|-------------|--------|-------|---------|-------|---------|
| ET-D75LE90  | 0.36:1 | 0.7 m | 78--73% | +/-6% | No Zoom |
| ET-D75LE50  | 0.7:1  | 1.4 m | 50% Fix |       | No Zoom |
| ET-D3LEW50  | 0.69:1 | 1.4 m |         |       | No Zoom |
| ET-D3LEU101 | 0.37:1 | 0.7 m | +/-66%  |       | No Zoom |
| ET-D3LEU100 | 0.37:1 | 0.7 m | +/-66%  |       | No Zoom |

Status

2022 Current model // Last update of the data: 2025-03-03  
Created: 2022-03-03 08:55:03

Data



More Details



# HCinema

<https://www.projector-database.com/pro/panasonicptrz17k-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.  
HCinema is not responsible for any errors or omissions contained in product descriptions.