

Philips ProScreen 2700



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

The stationary ProScreen 2700 LCD has 350 Ansi lumens, a contrast of 100:1 and a VGA 640 x 480 resolution. An image width of up to 163 cm is possible as the projector has 350 Ansi lumens. However, if room light is available, the picture should be max. 109 cm wide. It is no longer offered by the manufacturer Philips. It should also be noted that there are unfortunately no longer any replacement lamps available for the projector, neither originals nor replicas.



3 x 1,3" LCD TFT Panel

VGA 4/3 Liquid Crystal Display

Projector

350

100:1 full on/off

3,5000 min. Lumen

Screen

117 Lux (200 cm Screen width)

100:1 full on/off

1,205 min. Lumen

VGA 640 x 480

307.200 Pixel

NTSC, PAL, SECAM

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

250W Metalldampf Lamp

Article Nr.: LCA 3102

2000 h.

-

Manual

Manual

-

-

-

S-Video: (1) Mini DIN 4-pin

Video: (1) RCA jack

-

-

290 x 175 x 448 mm (11,4"x6,9"x17,6") 22,74 L/dm³

-

9,50 kg / 20,94 lbs.

-

-

-


11 fL / max. 163 cm screen width

38 cd/m²

-

-

-

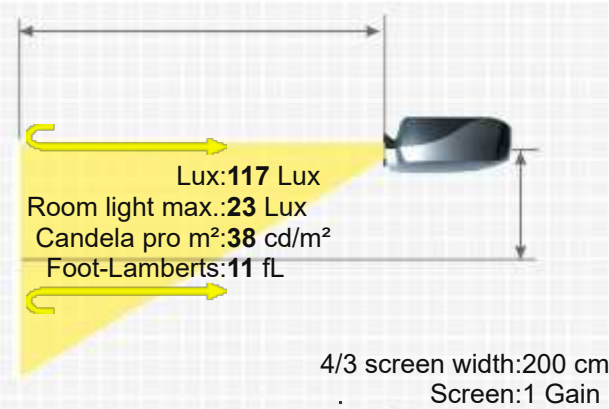

Optional accessories

Lampe Original

LCA3102

EOL €



Universal Fernbedienung

Fernb-uni-V3

22,31 €



Luftfilter universal

uni3mm

18,15 €

Status
Data - Discontinued (EOL) // Last update of the data: 2026-06-09



HCinema

<https://www.projector-database.com/pro/philipsproscreen2700-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.