

Philips ProScreen 4500

PHILIPS PROSCREEN 4500



Brief Introduction

Beta 2.5

A brief introduction to the Philips ProScreen 4500. The stationary LCD projector has a VGA 640 x 480 resolution and a contrast of 100:1. The manufacturer, Philips, specifies a lamp life of 8000 hours, which is over 11 years with a daily viewing time of 2 hours. An image width of up to 163 cm is possible as the projector has 350 Ansi lumens. However, if room light is available, the picture should be max. 109 cm wide. It is no longer offered by the manufacturer Philips.

Display Type



3 x LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Ansi-Lumen

350

117 Lux (200 cm Screen width)

Contrast

100:1 full on/off

100:1 full on/off

Black Level

3,5000 min. Lumen

1,205 min. Lumen

Offset

-

Resolution

VGA 640 x 480

307.200 Pixel

Video Modes

NTSC, PAL, SECAM

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very narrow picture width and rooms with very little light.

Light Source

100W UHP Lamp

Article Nr.: LCA 3104

Light Life

8000 h.

Operating Costs

0,3% / 0,01 €

Focus

Manual

Zoom

Manual

Objective

-

Throw Ratio

-

Audio

-

Connections

S-Video: (1) Mini DIN 4-pin

Video: (1) RCA jack

D-sub 15pin in

Ceiling Mounting

-

Power

-

Size WxHxD

-

Operating Noise

-

Weight

-

Keystone

-

Illumination

-

Frequenz

-

Foot-Lamberts

11 fL / max. 163 cm screen width

38 cd/m²

Features


-

Screen Mirroring

-

In Test

-

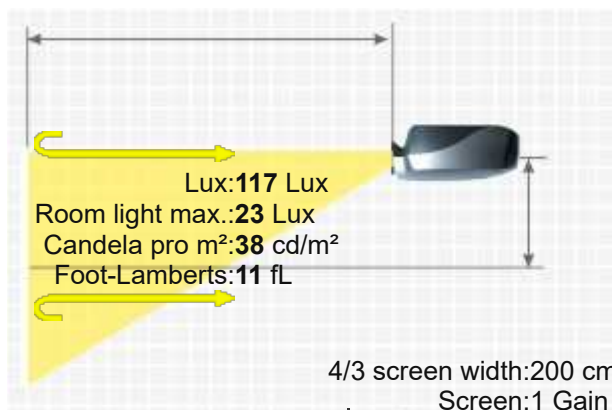

Optional accessories



Nackte Osram Lampe

NLMP2817

85,19 €

Lampe Original

LCA3104 / LCA3105

EOL €



Universal Fernbedienung

Fernb-uni-V3

22,31 €



Luftfilter universal

uni3mm

18,15 €

Status
Data

- Discontinued (EOL) // Last update of the data: 2026-06-09



HCinema

<https://www.projector-database.com/pro/philipsproscreen4500-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.