

Premier PD S680



Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

Features
Status
Data

A brief introduction to the Premier PD S680. The standard portable DLP projector has an SVGA 800 x 600 resolution and a contrast of 2000:1. The projector can illuminate a picture width of 444 cm well. However, if room light is available, the picture width should ideally not exceed 296 cm. On the market since 2006, the model is no longer offered by the manufacturer Premier.



1 x 0,55" DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Projector

2600
2000:1 full on/off
1,3000 min. Lumen

Screen
867 Lux (bei 200 cm Screen)
2000:1 full on/off
0,434 min. Lumen

SVGA 800 x 600
480.000 Pixel
SXGA 1280 x 1024 compressed
PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

2000 h.

Manual

Manual 1,2

-

-

1 x 2W

D-sub 15pin in
S-Video in
Cinch Video in
RS232C

-

250W

254 x 98 x 202 mm (10"x3,9"x8") 5,03 L/dm³


-

2,20 kg / 4,85 lbs.
Vert.: +/-15°
85%

-

81 fL / max. 444 cm screen width
278 cd/m²

■ 4-segment colour wheel
2006 Discontinued (EOL) // Last update of the data: 2023-08-04

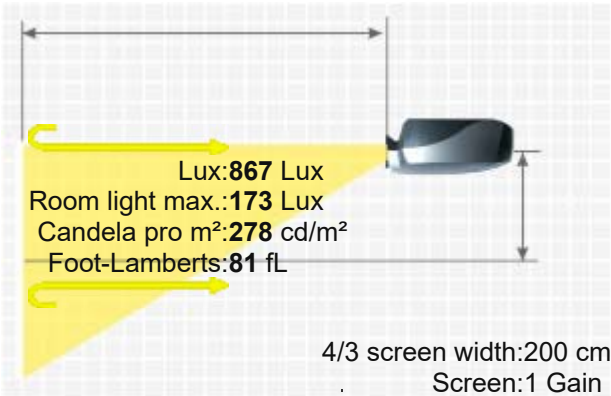

P R E M I E R P D S 6 8 0



HCinema

<https://www.projector-database.com/pro/premierpds680-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.