

Premier PJ S711



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

A brief introduction to the PJ S711: The Premier LCD projector offers 2500 Ansi lumens, a contrast of 500:1 and an SVGA 800 x 600 resolution. Thanks to the brightness of 2500 Ansi lumens, a picture width of 435 cm is possible. In room light, the picture should be max. 290 cm wide. This model is no longer offered by Premier. Unfortunately, we can no longer offer replacement lamps for this model, neither originals nor replicas.



3 x LCD TFT Panel

SVGA 4/3 Liquid Crystal Display

Projector

2500

500:1 full on/off

5,0000 min. Lumen

Screen

833 Lux (bei 200 cm Screen)

500:1 full on/off

1,676 min. Lumen

SVGA 800 x 600

480.000 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

Articel Nr.: LMP3028

2000 h.

Manual

Manual 1,3

f=21,5-28 mm

-

2 x 1W

DVI

D-sub 15pin in

Cinch Video in

S-Video in

Yes

240W

220 x 280 x 80 mm (8,7"x11"x3,1") 4,93 L/dm³

35dB

3,00 kg / 6,61 lbs.

Vert.: +/-15°

85%


H-sync: 15-79 kHz

Range max.: 230 MHz

77 fL / max. 435 cm screen width

264 cd/m²

-

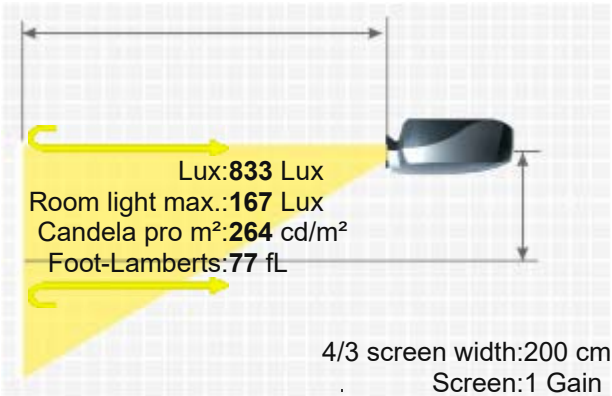

More Details



HCinema

<https://www.projector-database.com/pro/premierpjs711-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.