

projectiondesign F32 wuxga



The projectiondesign F32 wuxga BrilliantColor DLP projector has 5700 Ansi lumens, a contrast of 7500:1 and a WUXGA 1920 x 1200 resolution. With the lens shift function, the projector can be positioned very freely. An image width of up to 767 cm is possible as the projector has 5700 Ansi lumens. The projector can create rooms with residual light with a smaller image width, we recommend a maximum of 511 cm. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Furthermore, the projector can play 1080P without any problems and can therefore project Blu-rays even onto the ceiling thanks to 360° 1/2 projection. The model built in 2009 is no longer offered by projectiondesign.

Brief Introduction Beta 2.5

Display Type

1 x DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

5700

2533 Lux (bei 200 cm Screen)

Contrast

7500:1 full on/off

7500:1 full on/off

Black Level

0,7600 min. Lumen

0,338 min. Lumen

Lens shift

Vert.: +/-62,5% Hori.: +/-45%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

Application

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 300W UHP Lamp

Light Life

Article Nr.: 400-0400-00 / 400-0500-00

2000 h. 5000 h. in Eco Mode

Operating Costs

20,57% / 0,72 €

Focus

Powered

Zoom

Powered 1,25

Objective

F=2,1-6,5 f=34,1-42,7 mm

Throw Ratio

1,60-2,32:1

Audio

Nein

Connections


HDMI 1.3a

DVI-D mit HDCP in

5 x BNC RGBHV in

YUV in

Cinch Video in

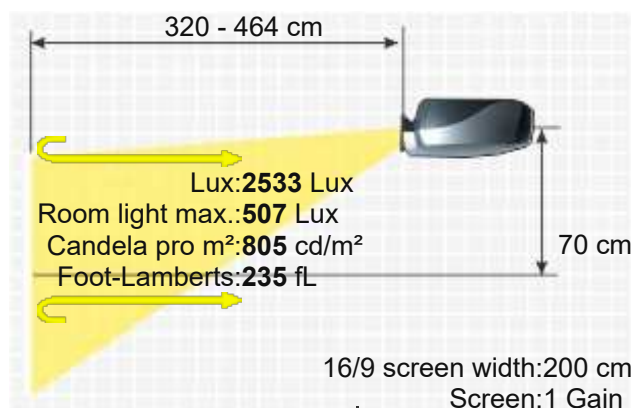

RJ45 in
RS232C Din 9pin in
USB in
12V Trigger



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
1050W
510 x 223 x 376 mm (20,1"x8,8"x14,8") 42,76 L/dm³
30 dB in Eco Mode

Weight
Keystone

12,60 kg / 27,78 lbs.
Vert.: +/-30°
Hori.: +/-15°

Illumination

Frequenz

Foot-Lamberts


-
H-sync: 15-150 kHz
V-sync: 48-190 Hz
Range max.: 205 MHz
235 fL / max. 767 cm screen width
805 cd/m²

Features

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- Gamma correction
- Digital image shift
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Remote control with backlight
- Lan network compatible.

Screen Mirroring

-

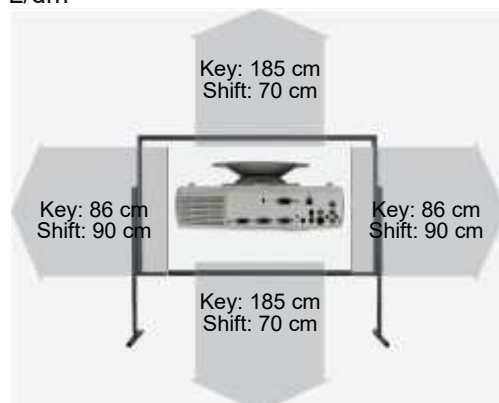

Optional accessories



Nackte Osram Lampe

NLMP5064

103,58 €



Lampe Ruby

Ruby-LMP5064

144,87 €



Lampe Original

R9801272 / 400-0400-00 / 400-0500-00

720,66 €



Kompatible Lampe

LMP-K15468

70,96 €



Objektiv Original

R9801249 / EN16

EOL €



Objektiv Original

R9801228 / EN13

EOL €



Objektiv Original

R9801225 / EN15

EOL €



Objektiv Original

R9801218 / EN12

EOL €



Objektiv Original

R9801214 / EN11

EOL €



Objektiv Original

R9801209 / EN14

EOL €

Deckenhalterung 220

Halterung45

83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
EN16	3.8-6.5:1	7.6-13 m	+/-62.5%	+/-45%	Powered
EN14	2.37-3.79:1	4.7-7.6 m	+/-62.5%	+/-45%	Powered
EN13	1.24-1.6:1	2.5-3.2 m	+/-62.5%	+/-45%	Powered
EN11	1.6-2.32:1	3.2-4.6 m	+/-62.5%	+/-45%	Powered
Fix Optional Lenses					
EN15	1.16:1	2.3 m	+/-62.5%	+/-45%	No Zoom
EN12	0.79:1	1.6 m	0.0% Fix		No Zoom
Status	2009 Discontinued (EOL) // Last update of the data: 2025-03-03				

Data



More Details



HCinema

<https://www.projector-database.com/pro/projectiondesignef32wuxga-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.