

projectiondesign F3 XGA



The F3 XGA DLP has 5500 Ansi lumens, a contrast of 7500:1 and an XGA 1024 x 768 resolution. With the lens shift function, the projector can be positioned very freely. Thanks to the brightness of 5500 Ansi lumens, an image width of 646 cm is possible. The projector will also work with slightly brighter rooms with a narrower picture width (we recommend max. 431 cm). At just 30 decibels, the device is one of the quieter projectors. The model was built by projectiondesign in 2005 and is no longer current, but is still very popular in our projector database.



1 x LVDS DC2 DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

5500 - 1000 stufenlos regelbar
7500:1 full on/off
0,7333 min. Lumen
Vert.: +/-55% Hori.: +/-45% motorisch
XGA 1024 x 768
786.432 Pixel
UXGA 1600 x 1200 compressed

Screen

1833 Lux (bei 200 cm Screen)
7500:1 full on/off
0,244 min. Lumen

Resolution
Video Modes
Application
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source
Light Life
2 x 250W UHP Lamp
Articel Nr.: 400-0400-00 / 400-0500-00
2000 h. 4000 h. in Eco Mode

Operating Costs
22,26% / 0,73 €

Focus
Powered


Zoom
Powered

Objective
optional

Throw Ratio
optional

Audio
-

Connections
DVI-D mit HDCP
D-sub 15pin in und out
5 x BNC RGBHV
YUV
Cinch Video in
S-Video in
Mini Jack
USB

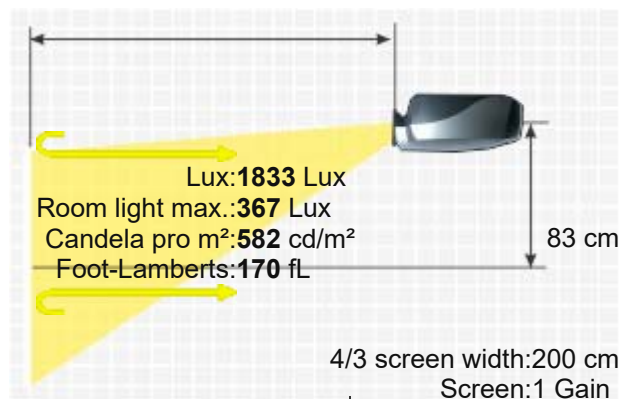

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

RJ45 Hub
RS232C Din 9pin



Ceiling Mounting Yes
Power 900W
Size WxHxD 507,3 x 218,3 x 375,4 mm (20"x8,6"x14,8") 41,45 L/dm³
Operating Noise 30dB

Weight 15,00 kg / 33,07 lbs.
Keystone Vert.: +/-40°
Hori.: +/-20°
Illumination -

Frequenz H-sync: 15-150 kHz
Range max.: 205 MHz


Foot-Lamberts 170 fL / max. 646 cm screen width
582 cd/m²

- Lens shift Funktion motorisch
- Eco Mode
- Gamma correction
- Dynamic iris
- Digital image shift
- 24/7 continuous operation capable
- Remote control with laser pointer und mouse control
- Lan network compatible.
- Faroudja DCDi with pull down
- Colour wheel optionally:
- - 3-segment 3x graphics, visualisation and simulation
- - 4-segment 2x graphics
- - 4-segment 2x high brightness

Please note Dadurch das beim Lens shift sich die komplette Lightengine mitbewegt ist der hohe Lens shift Wert von 110% möglich.

Optional	Bulb only	NLMP5064
	Lamp ruby	Ruby-LMP5064
	Lamp original	R9801272 / 400-0400-00 / 400-0500-00
	Compatible lamp	LMP-K15468
	Object lens original	R9801209 / EN14
	Object lens original	R9801214 / EN11
	Object lens original	R9801218 / EN12
	Object lens original	R9801225 / EN15
	Object lens original	R9801228 / EN13
	Object lens original	R9801249 / EN16
	Ceiling Mount 220	Halterung45

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n16593>

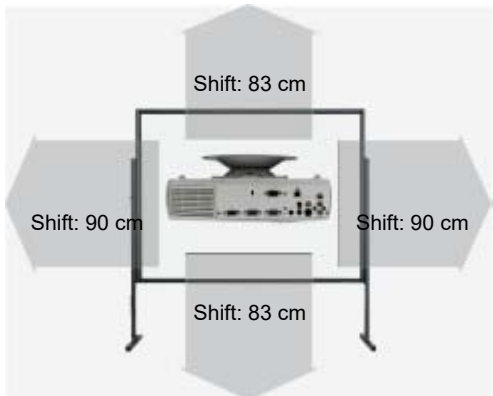

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
projectiondesign EN16	5.5-9.6:1	11-19.2 m	+/-55%	+/-45%	Powered
projectiondesign EN14	3.4-5.5:1	6.8-11 m	+/-55%	+/-45%	Powered
projectiondesign EN13	1.8-2.3:1	3.6-4.6 m	+/-55%	+/-45%	Powered
projectiondesign EN11	2.3-3.4:1	4.6-6.8 m	+/-55%	+/-45%	Powered
Fix Optional Lenses					
projectiondesign EN15	1.6:1	3.2 m	+/-55%	+/-45%	No Zoom
projectiondesign EN12	1.09:1	2.2 m	0.0% Fix		No Zoom
Status	2005 Discontinued (EOL) // Last update of the data: 2023-08-04				

Data



More Details



HCinema

<https://www.projector-database.com/pro/projectiondesignf3xga-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.