


projectiondesign FL32 1080



The FL32 1080 LED BrilliantColor DLP has 750 Ansi lumens, a contrast of 2000:1 - 7500:1 and an HDTV 1920 x 1080 resolution. The manufacturer specifies an LED service life of 100,000 hours, which equates to over 68.5 years with a daily viewing time of 4 hours. Including a lens shift function, which provides freedom during installation. The projector can illuminate an image width of up to 278 cm thanks to its 750 Ansi lumens. In room lighting, however, the picture width should ideally be less than 185 cm. It is also Full HD 1080P compatible. This model is no longer available from projectiondesign.

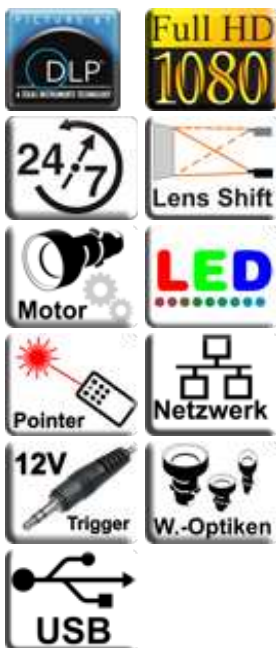

1 x 0,98" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector
750
2000:1 - 7500:1 full on/off
0,3750 min. Lumen
Vert.: +/-62,5% Hori.: +/-42%
HDTV 1920 x 1080
2.073.600 Pixel

Screen
333 Lux (bei 200 cm Screen)
2000:1 - 7500:1 full on/off
0,167 min. Lumen

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p
Stationary | Permanent installation in the training room and meeting room as well as the conference room.
Small screen width, rooms with very little ambient light below 100 lumens.

LED
100000 h.

0,00 € LED

Powered


Powered

optional

optional

Nein

HDMI 1.3 in
DVI-D in
D-sun 15 pin in
5 x BNC RGBHV in
YUV in
Cinch Video in
RJ45 in
2 x RSereC Din 9 pin in
USB in

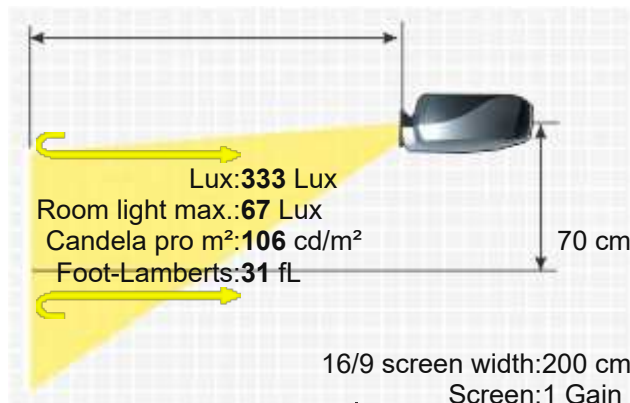

Ceiling Mounting 2 x 12V Trigger out
Power Yes, is possible.
350W
Size WxHxD 376 x 223 x 510 mm (14,8"x8,8"x20,1") 42,76 L/dm³
Operating Noise -


Weight 12,60 kg / 27,78 lbs.
Keystone -
Illumination -

Frequenz H-sync: 15-150 kHz
V-sync: 48-190 Hz
Range max.: 205 MHz

Foot-Lamberts 31 fL / max. 278 cm screen width
106 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Kensington Slot
- Gamma correction
- Digital image shift
- 24/7 continuous operation capable
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Lan network compatible.

Screen Mirroring -

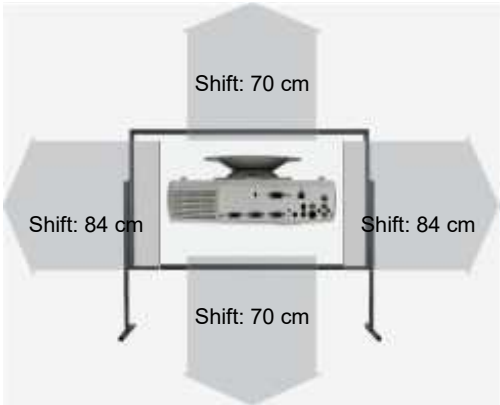

Optional accessories

	Objektiv Original	R9801249 / EN16	EOL €
	Objektiv Original	R9801228 / EN13	EOL €
	Objektiv Original	R9801225 / EN15	EOL €
	Objektiv Original	R9801218 / EN12	EOL €
	Objektiv Original	R9801214 / EN11	EOL €
	Objektiv Original	R9801209 / EN14	EOL €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
EN16	3.8-6.5:1	7.6-13 m	+/-62.5%	+/-42%	Powered
EN14	2.37-3.79:1	4.7-7.6 m	+/-62.5%	+/-42%	Powered
EN13	1.24-1.6:1	2.5-3.2 m	+/-62.5%	+/-42%	Powered
EN11	1.6-2.32:1	3.2-4.6 m	+/-62.5%	+/-42%	Powered
Fix Optional Lenses					
EN33	1.16:1	2.3 m	+/-62.5%	+/-42%	No Zoom
EN15	1.16:1	2.3 m	+/-62.5%	+/-42%	No Zoom
EN12	0.79:1	1.6 m	0.0% Fix		No Zoom

Status 2009 Discontinued (EOL) // Last update of the data: 2025-03-03

Data



More Details



HCinema

<https://www.projector-database.com/pro/projectiondesignfl32-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice.
HCinema is not responsible for any errors or omissions contained in product descriptions.