

Prolight PLF700AX



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

The Prolight model PLF700AX is an LCD projector with XGA 1024 x 768 resolution and a contrast of 450:1. An image width of up to 369 cm is possible. However, the picture should be smaller in room light. We recommend max. 246 cm. It is no longer offered by the manufacturer Prolight.

3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

1800
450:1 full on/off
4,0000 min. Lumen

600 Lux (bei 200 cm Screen)
450:1 full on/off
1,342 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC
Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.

165W EHPL Lamp
2000 h.

Manual

Manual 1,23

F=1,7-2,1 f=26-32 mm

1,8-2,3:1

1 x 2W

D-sub 15pin in
Cinch Video in
S-Video in
Mini Jack
USB
RS232C


Yes
230W
233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³
37dB

3,10 kg / 6,83 lbs.

-
-

H-sync: 15-80 kHz
V-sync: 43-85 Hz

56 fL / max. 369 cm screen width
192 cd/m²

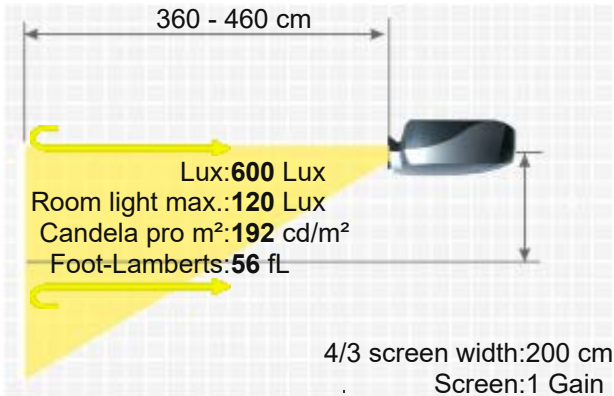

P R O L I G H T P L F 7 0 0 A X

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/prolightPLF700AX-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.