


Prolight PLF881BS



Brief Introduction
Beta 2.5

A brief introduction to the PLF881BS: The Prolight standard portable LCD projector offers 2000 Ansi lumens, a contrast of 450:1 and an SVGA 800 x 600 resolution. 2000 Ansi lumens ensure that an image width of 389 cm is also possible. However, if room light is available, the picture should be max. 259 cm wide. The model is no longer offered by Prolight.

Display Type	 3 x 0,79" LCD TFT Panel SVGA 4/3 Liquid Crystal Display	
Ansi-Lumen	Projector 2000	Screen 667 Lux (bei 200 cm Screen)
Contrast	450:1 full on/off	450:1 full on/off
Black Level Offset	4,4444 min. Lumen	1,492 min. Lumen
Resolution	SVGA 800 x 600 480.000 Pixel SXGA 1280 x 1024 compressed	
Video Modes	PAL, SECAM, NTSC	
Application	Standard-Portabel External training and company presentations, as well as product presentations.	
Light Source	180W Lamp	
Light Life	2000 h.	
Operating Costs	-	
Focus	Manual	
Zoom	Manual 1,23	
Objective	F=1,7-2,1 f=26-32 mm	
Throw Ratio	1,6-2,0:1	
Audio	1 x 2W	
Connections	DVI in D-sub 15pin in Cinch Video in S-Video in Mini Jack USB RS232C	
Ceiling Mounting	Yes	
Power	250W	
Size WxHxD	233 x 93 x 297 mm (9,2"x3,7"x11,7") 6,44 L/dm³	
Operating Noise	37dB	

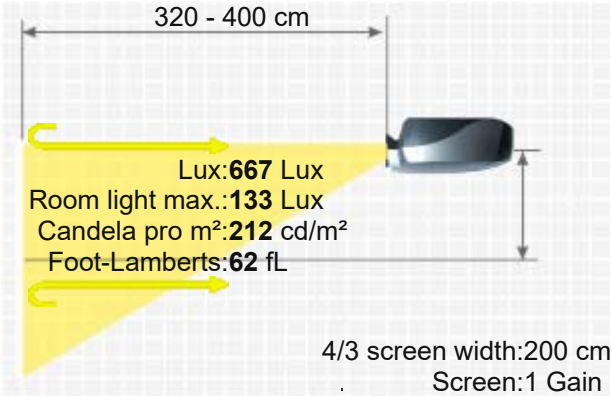

Weight	3,10 kg / 6,83 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-80 kHz V-sync: 43-85 Hz
Foot-Lamberts	62 fL / max. 389 cm screen width

212 cd/m²

Features
Status
Data

-
- Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/prolightPLF881BS-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.