

Proxima DP9250+



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting Power

Size WxHxD

Operating Noise

The standard portable Proxima DP9250+ LCD projector has 1900 Ansi lumens, a contrast of 350:1 and an XGA 1024 x 768 resolution. An image width of up to 380 cm is possible. However, the image should be smaller in room light. We recommend max. 253 cm. It is no longer offered by the manufacturer Proxima.



3 x 1,3" LCD TFT Panel mit MLA

XGA 4/3 Liquid Crystal Display with Micro Lense Array

Projector

1900

350:1 full on/off

5,4286 min. Lumen

Screen

615 Lux (bei 203 cm Screen)

350:1 full on/off

1.773 min. Lumen

XGA 1024 x 768

786.432 Pixel

SXGA 1280 x 1024 compressed

NTSC, NTSC 4.3, PAL, PAL-M, SECAM

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

150W UHP Lamp

Articel Nr.: LAMP-011

2000 h.

-

Powered

Powered 1,3

F=1,8-2,1 f=48,4-62,8 mm

1,83-2,38:1

2 x 2W Stereo

2 computer

2 audio

2 video

1 S-video

Yes

250W

272 x 154 x 412 mm (10,7"x6,1"x16,2") 17,26 L/dm³

-

6,20 kg / 13,67 lbs.


Vertical

-

H-sync: 15-100 kHz

V-sync: 50-100 Hz

57 fL / max. 380 cm screen width

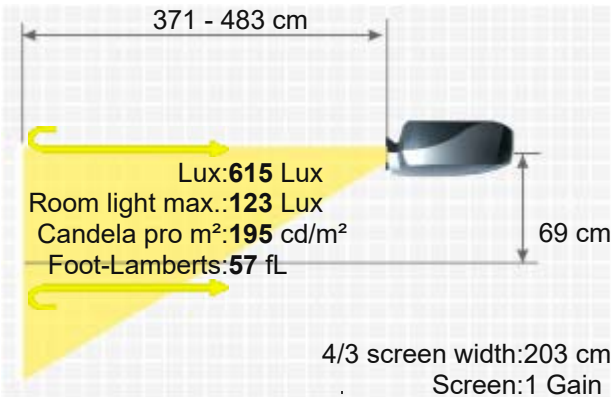

PROXIMA DP9250+

195 cd/m²

Features

- Remote control with laser pointer und mouse control

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
Proxima LENS-008	1.43-1.91:1	2.9-3.9 m			
Proxima LENS-007	1.3-1.8:1	2.6-3.7 m	45% Fix		

Status Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/proximadp9250plus-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.