

# Pyle PRJLE22



## Brief Introduction

Beta 2.5

## Display Type

## Ansi-Lumen

## Contrast

## Black Level

## Offset

## Resolution

## Video Modes

## Application

## Light Source

## Light Life

## Operating Costs

## Focus

## Zoom

## Objective

## Throw Ratio

## Audio

## Connections

## Ceiling Mounting

## Power

## Size WxHxD

## Operating Noise

## Weight

## Keystone

## Illumination

## Frequenz

## Foot-Lamberts

A brief introduction to the Pyle PRJLE22. The standard portable LCD projector has a WVGA 800 x 480 resolution and a contrast of 800:1. As Pyle specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. The projector can illuminate a screen width of up to 106 cm well thanks to the 108 Ansi lumens. In room lighting, however, the picture width should ideally be less than 71 cm. The model was built by Pyle in 2012 and is no longer current.



1 x 7" LCD TFT Panel

WVGA 16/9 Liquid Crystal Display

Projector

108 / 1800 Lumen

800:1 full on/off

0,1350 min. Lumen

Screen

48 Lux (bei 200 cm Screen)

800:1 full on/off

0,06 min. Lumen

WVGA 800 x 480

384.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

LED

-

0,00 € LED

Manual

No Zoom

-

-

-

HDMI in  
D-sub 15 pin in  
YUV in  
S-Video in  
Cinch Video in  
Cinch Stereo in

-

-

-

-


-

-

-

-

4 fL / max. 106 cm screen width  
14 cd/m<sup>2</sup>

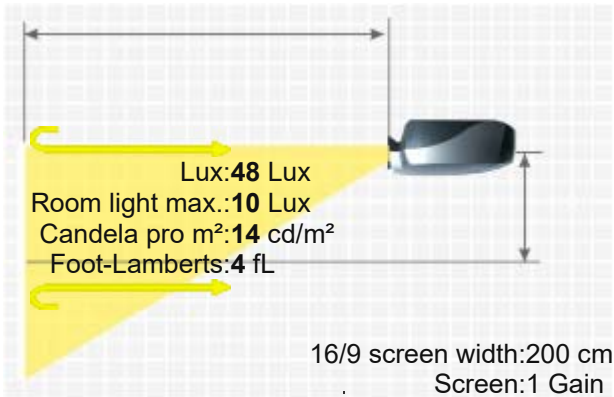

More Details



HCinema

<https://www.projector-database.com/pro/pyleprjle22-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.