

Roverlight Vision DS1200

ROVERLIGHT VISION DS1200



Brief Introduction

Beta 2.5

A brief introduction to the Roverlight Vision DS1200. The DLP projector has an SVGA 800 x 600 resolution and a contrast of 800:1. An image width of up to 302 cm is possible. However, the image should be smaller in room light. We recommend max. 201 cm. This model is no longer offered by Roverlight.

Display Type

1 x 0,7" DDR DLP Chip
SVGA 4/3 Ti Digital Light Processing Chip

Ansi-Lumen

1200

388 Lux (bei 203 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

1,5000 min. Lumen

0.487 min. Lumen

Offset

SVGA 800 x 600

Resolution

480.000 Pixel

XGA 1024 x 768 compressed

Video Modes

HDTV480p - 1080i VideoNTSC , PAL , SECAM

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source

200W UHP Lamp

Light Life

2000 h.

Operating Costs

-

Focus

Powered

Zoom

Powered 1,2

Objective

F=2,44-2,69

Throw Ratio

-

Audio

2 x 3W Stereo

1 RGB input (D-sub 15 pins× 1), 1 DVI (Digital Visual Interface), 1 audio inputs (Stereo mini jack× 1), 1 audio (RCA L&R× 2), 1 PS/2 connectivity (Centronic 8 pins), 1 component video input (Y Cb Cr× 1, via RGB), 1 S-Video input (mini DIN/4 pins× 1), 1 composite video input (RCA× 1), 1 RGB outputs (D-sub 15 pins× 1), 1 audio outputs (Stereo mini jack× 1), RS232, 12V relay

Connections



Ceiling Mounting


Yes

Power

-

Size WxHxD

277 x 85 x 225 mm (10,9"x3,3"x8,9") 5,3 L/dm³

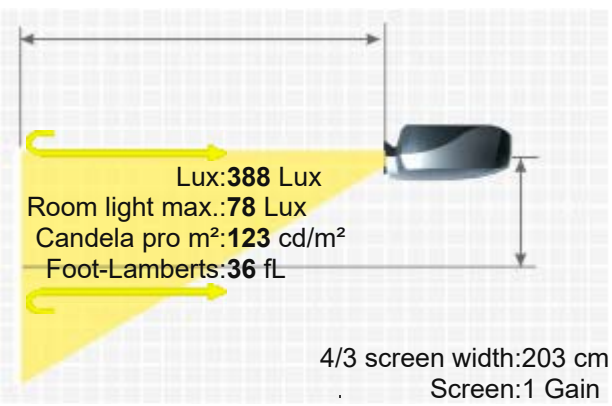

Operating Noise

-

Weight 2,90 kg / 6,39 lbs.
Keystone -
Illumination 90%

Frequenz H-sync: 15-100 kHz
V-sync: 43-120 Hz

Foot-Lamberts 36 fL / max. 302 cm screen width
123 cd/m²

Features -
Status - Discontinued (EOL) // Last update of the data: 2023-08-04

Data



More Details



HCinema

<https://www.projector-database.com/pro/roverlightvisionsds1200-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.