


Sanyo PLC 8810E

SANYO PLC 8810E

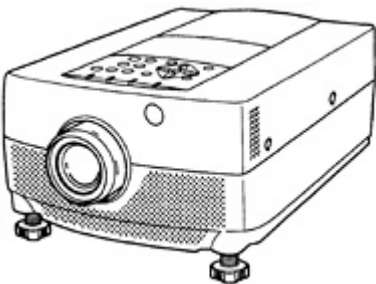

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

A brief introduction to the PLC 8810E: The Sanyo standard portable LCD projector offers 600 Ansi lumens, a contrast of 250:1 and an XGA 1024 x 768 resolution. Thanks to the brightness of 600 Ansi lumens, a picture width of 213 cm is possible. In room light, the picture should be max. 142 cm wide. The model is no longer offered by Sanyo.

3 x 1,3" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

600
250:1 full on/off
2,4000 min. Lumen
194 Lux (bei 203 cm Screen)
250:1 full on/off
0.786 min. Lumen

XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed
PAL/SECAM/NTSC/NTSC4.43
Standard-Portabel | External training and company presentations, as well as product presentations.
Small screen width, rooms with very little ambient light below 100 lumens.
120W Lamp
Articel Nr.: 610 265 8828
2000 h.

Powered


Powered 1,6

F=2,5-3,53 f=47,6-76,2 mm


1,8-2,88:1

2W Stereo

2 x D-sub 15pin in 1 x out
S-Video in
Cinch Video in
Cinch Stereo in und out
Mini Jack in und out

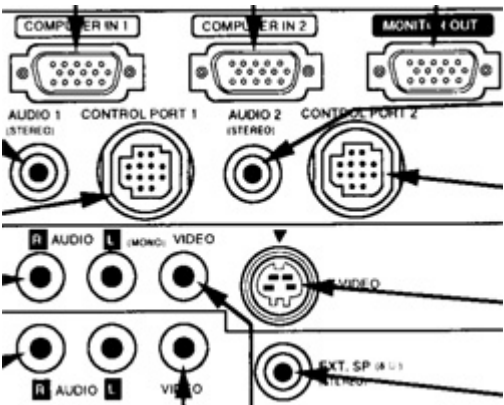

Yes

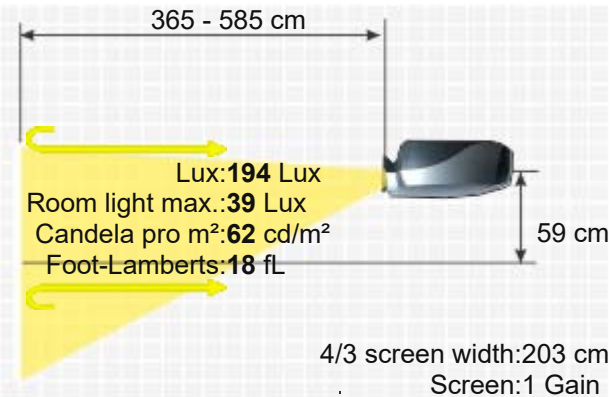

Power 200W
Size WxHxD 159 x 260 x 391 mm (6,3"x10,2"x15,4") 16,16 L/dm³
Operating Noise -

Weight 5,90 kg / 13,01 lbs.
Keystone -
Illumination 85%
Freuqenz H-sync: 15-80 kHz
V-sync: 50-100 Hz
Range max.: 135 MHz
Foot-Lamberts 18 fL / max. 213 cm screen width
62 cd/m²
Features ■ Freeze
■ Remote control with mouse control

Osram bulb only NLMP3328
Lamp ruby Ruby-LMP3328
Optional Lamp original 610-265-8828 / LMP14 / ET-SLMP14
Compatible lamp LMP-K1318
Universal Remote original Fernb-uni-V3

Status Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n3331>
Data - Discontinued (EOL) // Last update of the data: 2023-08-04

More Details



HCinema

<https://www.projector-database.com/pro/sanyopl8810n-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.