

Saville SSX 1300



S
A
V
I
L
L
E

S
S
X

1
3
0
0



A brief introduction to the Saville SSX 1300. The standard portable LCD projector has an XGA 1024 x 768 resolution and a contrast of 450:1. The projector will be able to illuminate a picture width of 314 cm well. However, if room light is available, the picture width should ideally not exceed 209 cm. The projector is no longer sold by the manufacturer.

 3 x 0,79" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector	1300	433 Lux (bei 200 cm Screen)
	450:1 full on/off	450:1 full on/off
	2,8889 min. Lumen	0,969 min. Lumen

Resolution: XGA 1024 x 768
786.432 Pixel
SXGA 1280 x 1024 compressed

Video Modes: NTSC3,58, NTSC4,43, PAL60, SECAM, DTV, 480i, 480p, 580i, 580p, 720p, 1.080i

Application: Standard-Portabel | External training and company presentations, as well as product presentations.

Small screen width, rooms with very little ambient light below 100 lumens.

Light Source: 165W UHP Lamp
Light Life: 3000 h. 4500 h. in Eco Mode

Operating Costs: -

Focus: Manual

Zoom: Manual 1,19

Objective: F=1,9-2,2 f=26-31 mm

Throw Ratio: 1,6-1,9:1

Audio: 1W Mono

Connections: D-sub 15pin in
S-video in
Cinch Video in
RS232C

Ceiling Mounting: Yes

Power: 240 / 190W in Eco mode

Size WxHxD: 297 x 89 x 229 mm (11,7"x3,5"x9") 6,05 L/dm³

Operating Noise: 35 / 31 dB in Eco Mode

Weight: 2,90 kg / 4,41 lbs.

Keystone: Vertical

Illumination: 95%

Frequenz: H-sync: 15-70 kHz

V-sync: 43-85 Hz

Range max.: 108 MHz


Foot-Lamberts: 40 fL / max. 314 cm screen width

137 cd/m²

■ Eco Mode

■ sRGB

■

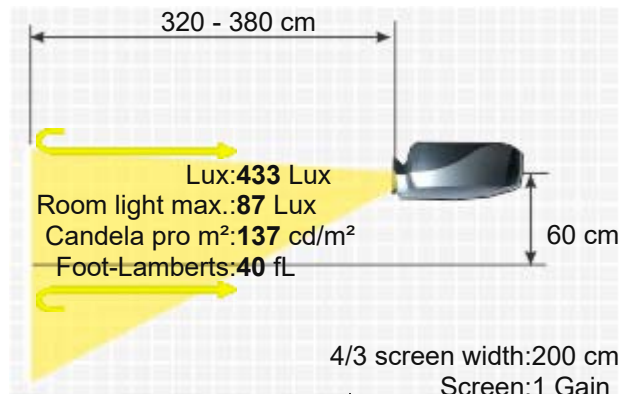

More Details



HCinema

<https://www.projector-database.com/pro/savillessx1300-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.