

Sharp PG-SX80

SHARP PG-SX80



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

The standard portable PG-SX80 DLP has 3000 Ansi lumens, a contrast of 2000:1 and an XGA 1024 x 768 resolution. The projector can illuminate an image width of up to 477 cm thanks to its 3000 Ansi lumens. In room light, however, the image width should ideally be less than 318 cm. The projector can also play 1080P without any problems. The model built in 2020 is no longer offered by Sharp.



1 x 0,55" DLP Chip

XGA 4/3 Ti Digital Light Processing Chip

Projector

3000

2000:1

1,5000 min. Lumen

Screen

1000 Lux (bei 200 cm Screen)

2000:1

0,501 min. Lumen

XGA 1024 x 768

786.432 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with a little more ambient light, max. 200 lumens.

230W Lamp

Articel Nr.: AN-SX80LP

2000 h.

-

Manual


Manual

-


-

7W x1

HDMI in
D-sub 15pin in und out
Cinch Video in
Cinch Stereo in
S-Video in
Mini Jack Audio in und out
RS232C Din 9 pin in
USB IN
RJ-45

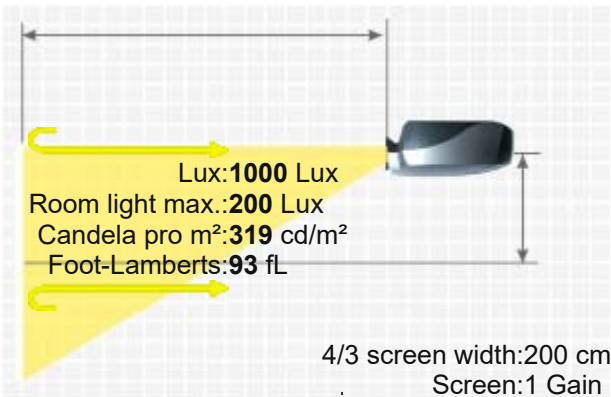

PG-SX80

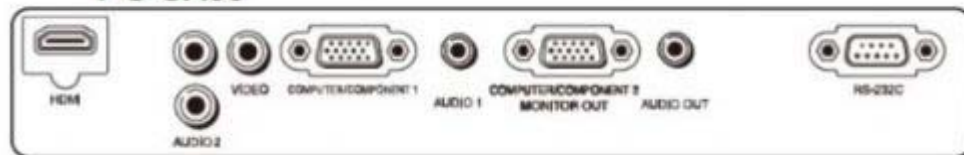

Ceiling Mounting	Yes
Power	293W
Size WxHxD	324 x 86 x 245 mm (12,8"x3,4"x9,6") 6,83 L/dm³
Operating Noise	34 / 30 dB in Eco Mode
Weight	2,60 kg / 5,73 lbs.
Keystone	-
Illumination	-
Frequenz	H-sync: 15-110 kHz V-sync: 45-85 Hz
Foot-Lamberts	93 fL / max. 477 cm screen width 319 cd/m²
Features	■ Full HD 1080P compatible ■ Eco Mode
Status	2020 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/sharpsharpjsx80-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.