

Steinmann VC3



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power
Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

Features
Status
Data

A brief introduction to the VC3: The Steinmann LCD projector offers 2000 Ansi-Lumen, a contrast of 600:1 and an SVGA 800 x 600 resolution. An image width of up to 389 cm is possible. However, the image should be smaller in room light. We recommend max. 259 cm. On the market since 2008, the model is no longer offered by the manufacturer Steinmann.

1 x 5" LCD TFT Panel
SVGA 4/3 Liquid Crystal Display

2000
600:1 full on/off
3,3333 min. Lumen
667 Lux (bei 200 cm Screen)
600:1 full on/off
1,117 min. Lumen

SVGA 800 x 600
480.000 Pixel
SXGA 1280 x 1024 compressed

Pal, SECAM, NTSC
Standard-Portabel | External training and company presentations, as well as product presentations.
Medium screen width or rooms with little light, max. 100 lumens.

-
-

-

-

-

-

-

-

HDMI in
D-sub 15 pin in
S-Video in
Cinch Video in
-
200W
250 x 90 x 300 mm (9,8"x3,5"x11,8") 6,75 L/dm³
-


6,50 kg / 14,33 lbs.

-
-

-

62 fL / max. 389 cm screen width
212 cd/m²

Picture-in-Picture
2008 Discontinued (EOL) // Last update of the data: 2023-08-04

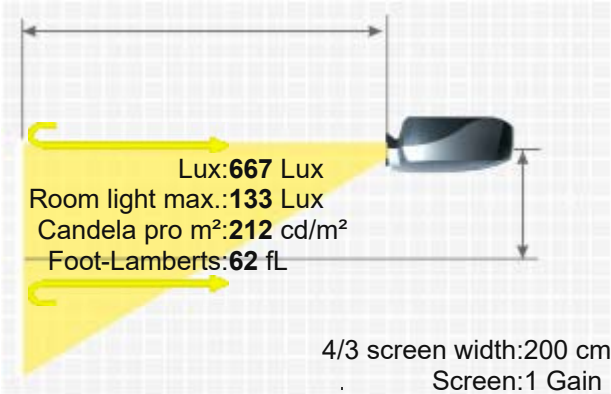



HCinema

<https://www.projector-database.com/pro/steinmannvc3-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.