

SVIC L350



SVIC L350



A brief introduction to the L350: The SVIC standard portable LCD projector offers 108 Ansi lumens, a contrast of 800:1 and a VGA 640 x 480 resolution. As SVIC specifies the brightness of the projector in lumens, we have calculated an approximate Ansi lumen value in this case. Due to the brightness of 108 Ansi lumens, a picture width of 91 cm is possible. In room light, the picture should be max. 61 cm wide. It came onto the market in 2008 and is no longer offered by the manufacturer SVIC.

Brief Introduction

Beta 2.5

Display Type

1 x 3,5" LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Ansi-Lumen

108 1800 Lumen

36 Lux (bei 200 cm Screen)

Contrast

800:1 full on/off

800:1 full on/off

Black Level

0,1350 min. Lumen

0,045 min. Lumen

Offset

VGA 640 x 480

Resolution

307.200 Pixel

XGA 1024 x 768 compressed

Video Modes

PAL, SECAM, NTSC

Application

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

Light Source

LED

Light Life

-

Operating Costs

0,00 € LED

Focus

-

Zoom

-

Objective

-

Throw Ratio

-

Audio

2 x 2W

Connections

S-Video in
Cinch Video in
YUV in

Ceiling Mounting

-

Power

-

Size WxHxD

-

Operating Noise

-

Weight

-

Keystone

-

Illumination

-

Frequenz


-

Foot-Lamberts

3 fL / max. 91 cm screen width
10 cd/m²

Features

■ iPod docking station.

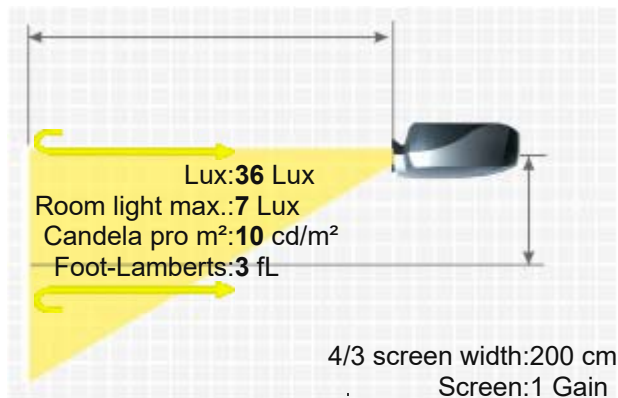

More Details



HCinema

<https://www.projector-database.com/pro/svcl350-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.