

TOSHIBA

P75

Making light work on the road



P75



The P75 delivers a portable solution with excellent value for money.

Featuring an XGA resolution at an impressive 2300 ANSI Lumens the P75 will transform your presentations irrespective of the lighting conditions.

Weighing in at a mere 1.9kg the P75 is the perfect travel companion, and thanks to the all digital DLP™ technology it boasts a 2000:1 contrast ratio.


The P75's sleek aluminium design and slim lines also feature TrueVision™, an integrated video scalar / de-Interlacer, ensuring an image that really delivers on both data and moving images.

Check into business class with the new P75 projector from Toshiba.

Projection Distance

SCREEN SIZE	Diagonal (inches)	40"	60"	80"	100"	150"	200"	250"	300"
	Horizontal (m)	0.81	1.22	1.63	2.03	3.05	4.06	5.08	6.10
	Vertical (m)	0.61	0.91	1.22	1.52	2.29	3.05	3.81	4.57
DISTANCE	Minimum (metres)	1.33	2.00	2.66	5.00	5.00	6.66	8.33	9.99
	Maximum (metres)	1.63	2.44	3.36	6.11	6.11	8.14	10.18	

Connections

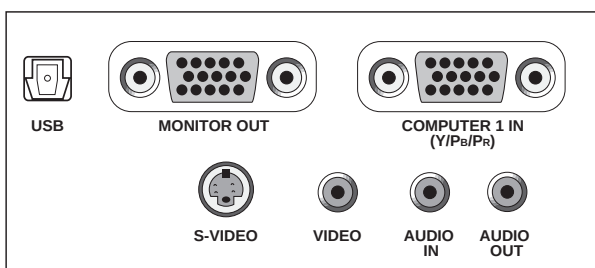

Box Contents

Operating manual & CD-ROM,
RGB and Power cables,
Mouse remote control, IR
receiver for mouse remote,
Batteries, Softcase

Key Features

Ultra Portable
Auto-Image set-up
Mouse Remote with Laser
High Contrast Ratio
Freeze Function
Eco Mode

Model		P75
Display	Part Number	TDP-P75
	Display Type	DLP™
	Shape	Aspect Ratio 4:3 (16:9 Switchable) Size 0.7" XGA panel x 1
	Number Of Pixels	786,432 pixels (1,024x768)
	Drive Method	DDR 12 degree (DDP2000)
	Contrast Ratio	2000:1
	Resolution	Real XGA
	Upgraded Video Processing	TrueVision De-Interlacing™
Image	Brightness (ANSI)	2300 lm
	Lamp	200W - TLPLW7
	Service Life of Lamp **	2000h / 3000h (Eco mode)
	Colour Reproduction	16.7 Million Colours
	Colour Wheel (DLP)	Segments (Qty) Speed RGBW 4 Segment 2X
	Projection distance (m)	1.0 - 10.0m (3.2 - 32.81ft)
	Picture Size (Diagonal)	0.76 - 7.62m (30.0 - 300")
	Projection Method	Front, Rear, or Ceiling
	Keystone Correction	Vertical Horizontal Digital +/-15 degrees None
	Optical zoom and Focus Methods	Manual Zoom & Focus
Lens	"F" Value Aperture	F = 2.4 - 2.6
	"f" Value Focal length (mm)	f = 24.0 - 29.1mm
	Zoom Ratio	1.2 x
	Throw Ratio	1.63 - 2.05:1
Signal	Compatible Frequency	Horizontal (KHz) Vertical (Hz) 15.6 - 68.7KHz 48 - 85Hz
	Input Signals	Video Signal NTSC / PAL / SECAM
		Colour Difference 480i/480p/525i/525p/1080i/720p
		RGB Real Display VGA / SVGA / XGA
		RGB Compressed SXGA
Terminals	Input	Video Signal 1x S-Video, 1 x RCA
		Computer Signal 1 x RGB
		Audio Signal 1 x Stereo Mini Jack
		Control and Other USB
General	Output	1 x RGB, 1x Stereo Mini Jack
	Operating Noise	35dB (Eco)
	Embedded Speaker	1W Mono
	Weight (kg)	1.9kg
	Dimensions W x D x H	245 x 183 x 86
	Power source	AC100-240V, 50 / 60Hz
	Power Consumption (W)	265W
	Security	Kensington Slot
	Warranty	Projector 3 Year RTB
		Lamp 90 Days

** Actual lamp life may vary based on ambient environment

TOSHIBA

TOSHIBA INFORMATION SYSTEMS (U.K.) LTD.

Projection and Display Technology
Toshiba Court, Weybridge Business Park,
Addlestone Road, Weybridge, Surrey KT15 2UL

www.toshiba.co.uk/projectors