


Unic 1200X



UNIC 1200X

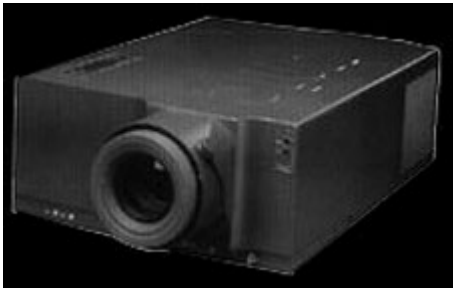

Brief Introduction
Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

Weight

Keystone

Illumination

Frequenz

Foot-Lamberts

Features

Status

Data

A brief introduction to the 1200X: The Unic LCD projector offers 1000 Ansi-Lumen, a contrast of 100:1 and a VGA 640 x 480 resolution. An image width of up to 275 cm is possible. However, the image should be smaller in room light. We recommend max. 183 cm. This model is no longer available from Unic.



3 x 10,4 LCD TFT Panel
VGA 4/3 Liquid Crystal Display

Projector

1000

100:1 full on/off

10,0000 min. Lumen

333 Lux (bei 200 cm Screen)

100:1 full on/off

3.43 min. Lumen

Screen

VGA 640 x 480
307.200 Pixel

NTSC, PAL, SECAM Pal 60 NTSC 4,43

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Small screen width, rooms with very little ambient light below 100 lumens.

- Lamp

1000 h.

-

Manual

Manual

-

-

-

-

-

-

-

-

-

-


-

-

31 fL / max. 275 cm screen width
106 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

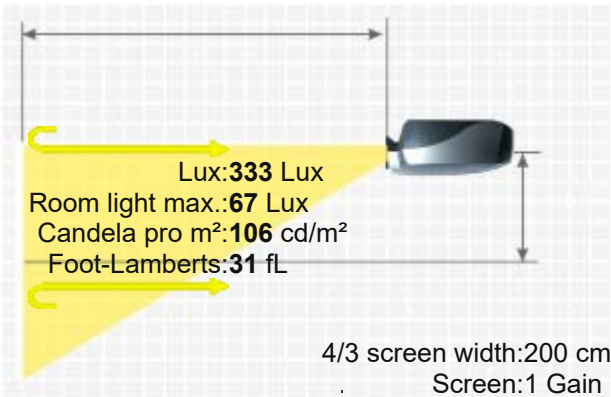



HCinema

<https://www.projector-database.com/pro/unic1200x-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.