

Unicview NSL3

UNICVIEW NSL3



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

The Unicview NSL3 Standard Portable LED LCD Projector has 500 ANSI lumens, a contrast ratio of 1400: 1, and an HDTV resolution of 1920 x 1080. It is an LED projector with a lamp life of 20,000 hours, which would equate to over 13.7 years at 4 hours of use per day. Files can be played directly via the built-in media player.

1 x LCD Panel
HDTV 16/9 Liquid Crystal Display

500
1400:1
-

HDTV 1920 x 1080

2.073.600 Pixel
UHD (4K2K) 3840 x 2160 compressed

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), EDTV 480p, 576p
Media player formats: Video: 4K, 1080P, H.265, AV1 Audio: MP3, AAC, AC3 Picture: JPG, PNG, BMP

Standard-Portabel | External training and company presentations, as well as product presentations.

Very narrow picture width and rooms with very little light.

50W LED
20000 h.

0,00 € LED

Automatic

No Zoom

-

-


-

HDMI 2.1 in
Mini Jack Audio out
USB-A 2.0 in
Bluetooth 5.2



Yes, is possible.

222 Lux (200 cm Screen width)
-
-

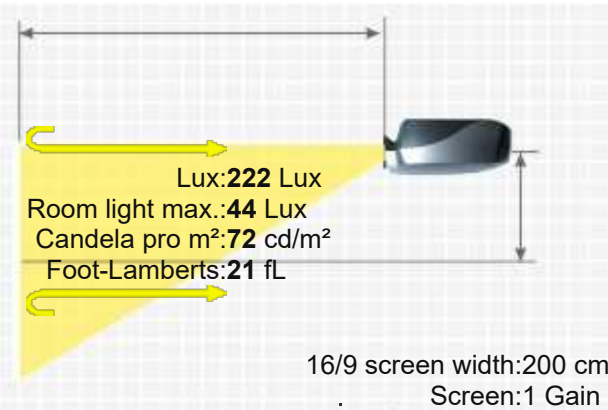

Power 60W
Size WxHxD 230 x 70 x 230 mm (9,1"x2,8"x9,1") 3,7 L/dm³
Operating Noise -

Weight 1,80 kg / 2,2 lbs.
Keystone Vertical ja und horizontal
Illumination -

Frequenz -

Foot-Lamberts 21 fL / max. 227 cm screen width
72 cd/m²
■ Full HD 1080P compatible
■ Integrated Mediaplayer
■ Automatic and manual vertical keystone correction
■ High Dynamic Range (HDR)
■ Wi-Fi network compatible.

Features
■ Linux OS
■ Auto 4P Keystone
■ Auto Obstacle Avoidance
■ Auto Screen Fit
■ 360° Gimbal
■ HDR10+ / HLG

Screen Mirroring Miracast, Airplay, Windows, DLNA
Status 2026 Current model // Last update of the data: 2026-06-29



More Details



HCinema

<https://www.projector-database.com/pro/unicviewns13-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.

