

UTAX DXD 5022



UTAX DXD 5022



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset



1 x 0,69" 12 Grad DDR DLP Chip
XGA 4/3 Ti Digital Light Processing Chip

Projector

2200
1500:1 full on/off
1,4667 min. Lumen

733 Lux (bei 200 cm Screen)
1500:1 full on/off
0,49 min. Lumen

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

XGA 1024 x 768

786.432 Pixel

SXGA+ 1400 x 1050 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Medium screen width or rooms with little light, max. 100 lumens.

200W Lamp

Articel Nr.: 11357022

2000 h. 2500 h. in Eco Mode

-

Automatic

Manual 1,2

F=2,4-2,6 f=25,7-30,8 mm

1,8-2,16:1

1W Mono

D-sub 15pin in

Cinch Video in

S-Video in

Mini jack in

RS232C Din 8pin

Yes

260W

260 x 88,9 x 208,5 mm (10,2"x3,5"x8,2") 4,76 L/dm³

37 / 33 dB in Eco Mode

2,00 kg / 4,41 lbs.



Vert.: +/-16° automatisch

-

H-sync: 15-100 kHz

V-sync: 50-85 Hz

68 fL / max. 408 cm screen width
233 cd/m²

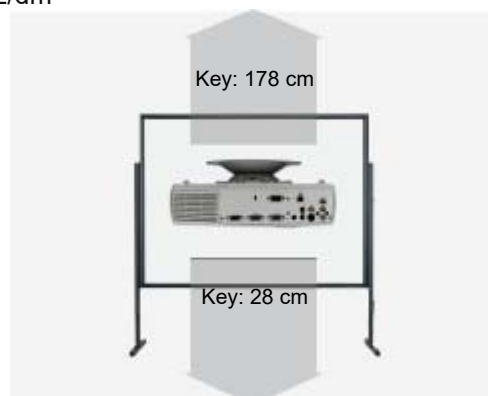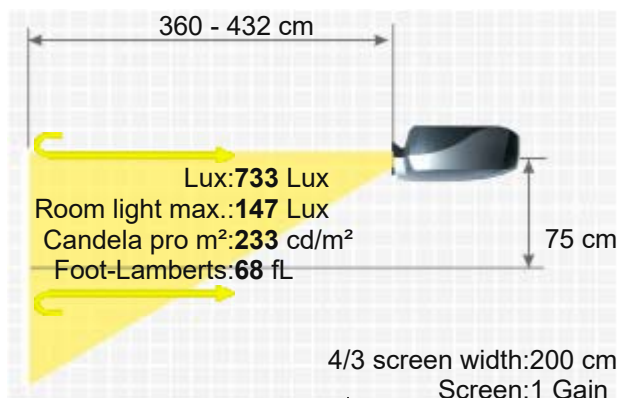

- Direkt Power Off
- Freeze
- Eco Mode
- Automatic and manual vertical keystone correction
- Kensington Slot
- Digital Zoom
- De-interlacer with 3:2 2:2 pull down

Philips bulb only NLMP18017

Lamp ruby Ruby-LMP18017

Lamp original 11357022

Compatible lamp LMP-K18017

Remote control original 7N901053 / RD-469E / 7N900881 / RD-443E

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n18017>

2005 Discontinued (EOL) // Last update of the data: 2023-08-04



HCinema

<https://www.projector-database.com/pro/utaxdx5022-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.