

Vinew VP-LX3



Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen
Contrast
Black Level
Offset

Resolution

Video Modes

Application

Light Source
Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting
Power

Size WxHxD
Operating Noise

Weight
Keystone
Illumination

Frequenz

Foot-Lamberts

Features

The standard portable Vinew VP-LX3 LCD projector has 4000 Ansi lumens, a contrast of 700:1 and an XGA 1024 x 768 resolution. The manufacturer specifies a lamp life of 4000 hours, which is over 5.5 years with a daily viewing time of 2 hours. 4000 Ansi lumens ensure that a picture width of 551 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 367 cm. The projector is very quiet compared to others with an operating noise of 30 decibels. It is no longer offered by the manufacturer Vinew.



3 x 0,7" LCD TFT Panel
XGA 4/3 Liquid Crystal Display

Projector

4000
700:1 full on/off
5,7143 min. Lumen

Screen

1333 Lux (bei 200 cm Screen)
700:1 full on/off
1,912 min. Lumen

XGA 1024 x 768
786.432 Pixel

SXGA 1280 x 1024 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, EDTV 480p, 576p

Standard-Portabel | External training and company presentations, as well as product presentations.

Wide screen width or rooms with plenty of light (over 200 lumens).

180W EHPL Lamp
4000 h.

Manual

Manual

-

-

1 x 2W

D-sub 15 pin in
S-Video in
Cinch Video in
RS232C

Yes

250W


310 x 96 x 270 mm (12,2"x3,8"x10,6") 8,04 L/dm³
30dB

2,70 kg / 5,95 lbs.
Vert.: +/-30°
95%

-

124 fL / max. 551 cm screen width
425 cd/m²

-

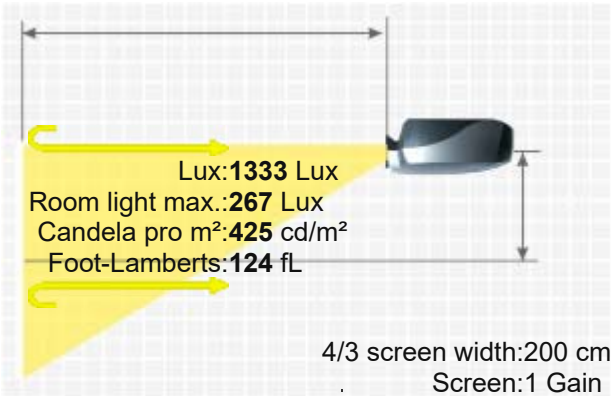

More Details



HCinema

<https://www.projector-database.com/pro/vinewvplx3-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.