


Vivitek DU8053Z

VIVITEK DU8053Z

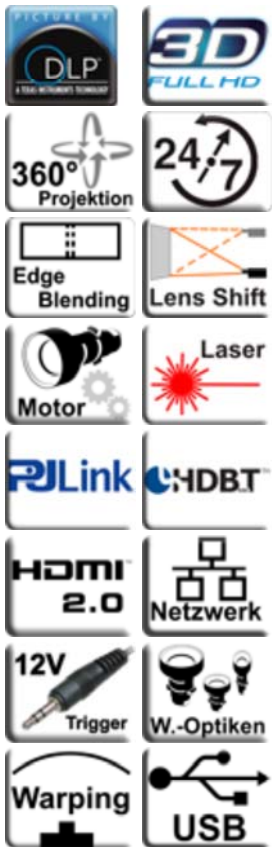

The DU8053Z 3D laser DLP projector from Vivitek has 14,000 ANSI lumens, a contrast ratio of 3,000,000:1 and a WUXGA 1920 x 1200 resolution. It is a laser projector with a 200,000-hour light lifetime, which would be 13.7 years with a daily viewing time of 4 hours. The horizontal and vertical keystone correction provides leeway when setting up. 14,000 ANSI lumens ensure that an image width of 1202 cm is also possible. The projector can create rooms with low light and a smaller image width, but we would recommend a maximum of 801 cm. If the image is still too small, the projector offers integrated edge blending software that allows multiple projectors to project a large image together. The model is also Full HD 1080P and 4K (compressed) compatible, and even has the option of projecting HD 1080P and 4K (compressed) Blu-rays onto the ceiling using 360° projection.

Brief Introduction

Beta 2.5

 1 x 0,8" DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Display Type

Ansi-Lumen

Projector 14000

Screen 6222 Lux (bei 200 cm Screen)

Contrast

3000000:1 full on/off

Screen 3000000:1 full on/off

Black Level

0,0047 min. Lumen

Screen 0,002 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-20%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

UHD (4K2K+) 3840 x 2400 compressed

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 4K UHD (komprimiert), 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Application

Event | Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

Dual Laser

Light Life

20000 h. / 30000 h. in Eco Mode

Operating Costs

0,00 € Laser

Focus

Powered

Zoom

Powered x1,5

Objective


optional

Throw Ratio

optional

Audio

1 x 10W

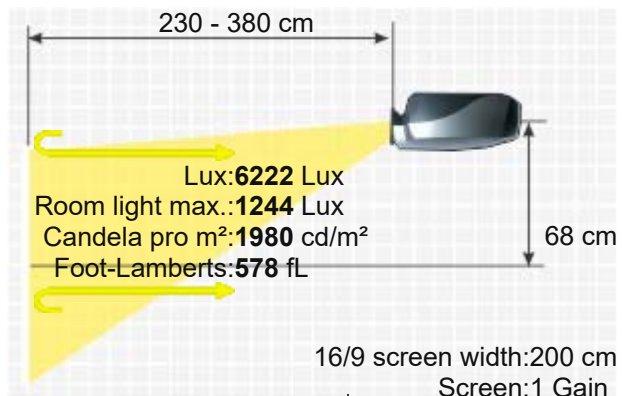

2x HDMI 2.0 in (HDCP V2.2)
 2x DisplayPort 1.2
 DVI-D in
 3G-SDI in und out
 3D Sync In und Out
 USB-A (power only) in
 RS232C Din 9 pin in
 RJ45 in
 HDBaseT
 12V Trigger

Connections



Ceiling Mounting

Yes

Power

860W Normal

Size WxHxD

500 x 216 x 591 mm (19,7"x8,5"x23,3") 63,83 L/dm³

Operating Noise

40 / 39 dB in Eco Mode

Weight

29,40 kg / 63,93 lbs.

Keystone

Vert.: +/-60°

Hori.: +/-20°

Illumination

85%

Frequenz

-


Foot-Lamberts

578 fL / max. 1202 cm screen width

1980 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Warping
- 360° installable
- 24/7 continuous operation capable
- Edge Blending
- PJLink™
- Lan network compatible.
- Constant Input: Auto Switching

Features

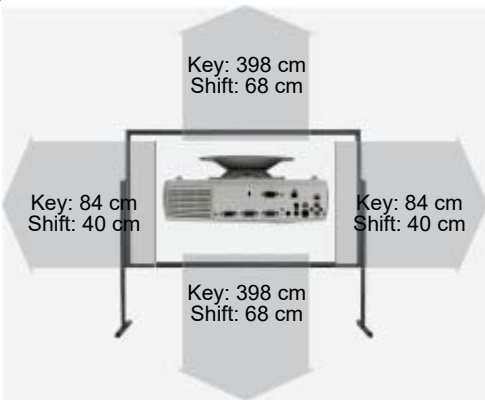

Optionaler Zubehör



Deckenhalterung Länge 225 mm

Halterung45

85,80 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
D89-WZ01	1.05-1.41:1	2.1-2.8 m	+/-60%	+/-20%	Powered
D89-UWZ02	0.74-1.08:1	1.5-2.2 m	+/-60%	+/-20%	Powered
D89-UWZ01	0.55-0.75:1	1.1-1.5 m	+/-60%	+/-20%	Powered
D89-UST01	0.31-0.33:1	0.6-0.7 m	+/-60%	+/-20%	Powered
D89-STD01	1.4-2.11:1	2.8-4.2 m	+/-60%	+/-20%	Powered
D89-SMLZ01	2.1-4:1	4.2-8 m	+/-60%	+/-20%	Powered
D88-LOZ201	4.46-6.94:1	8.9-13.9 m	+/-60%	+/-20%	Powered
D88-LOZ101	3-4.52:1	6-9 m	+/-60%	+/-20%	Powered

2024 Current model // Last update of the data: 2025-01-27

Created: 2025-01-09 15:59:38

Status

Data





HCinema

<https://www.projector-database.com/pro/vivitekdu8053z-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.