

Zenith Pro 851X



ZENITH PRO 851X



7" ESF CRT
4/3 Elektrostatisch Fokussierte Röhre

Display Type

Ansi-Lumen

Contrast

Black Level

Offset

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Ceiling Mounting

Power

Size WxHxD

Operating Noise

565 650 Peak Lumen

-

-

-

-

NTSC, PAL, SECAM

CRT Projection | Very narrow picture width and rooms with very little light.

CRT Röhre

ca. 10000 - 20000 h. (je nach Anwendung)

-

Manual

No Zoom

Delta 115

-

-

-

Yes

-

-

-

59,00 kg / 130,07 lbs.

-

-

H-sync: 15-16 kHz

V-sync: 50-60 Hz

Range max.: 12,5 MHz


17 fL / max. 207 cm screen width

58 cd/m²

-

- Discontinued (EOL) // Last update of the data: 2023-08-04

Data

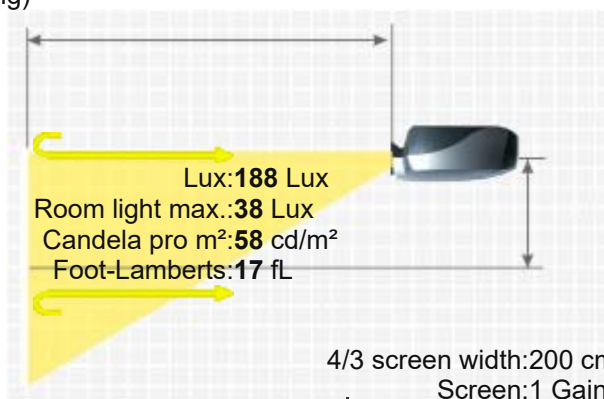

More Details



HCinema

<https://www.projector-database.com/pro/zenithpro851x-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.