

Christie MIRAGE HD6K-M

CHRISTIE MIRAGE HD6K-M



The Christie model MIRAGE HD6K-M is a DLP projector with HDTV 1920 x 1080 resolution and a contrast of 10000:1. The integrated lens shift gives freedom when positioning the projector. An image width of up to 787 cm is possible, if the image width is smaller (we recommend max. 525 cm), rooms with residual light are also no problem. If the image width is not sufficient, the projector offers integrated edge blending software, which allows several projectors to project a large image together. Video signals 1080P and 3D are also no problem for the projector. On the market since 2010, the model is no longer offered by the manufacturer Christie.

Brief Introduction

Beta 2.5

Display Type



3 x 0,95" DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

Projector 6000

Screen 2667 Lux (bei 200 cm Screen)

Contrast

10000:1 full on/off

10000:1 full on/off

Black Level

0,6000 min. Lumen

0,267 min. Lumen

Lens shift

Vert.: +/-60% Hori.: +/-21% motorisch

Resolution

HDTV 1920 x 1080

2.073.600 Pixel

Video Modes

QXGA 2048 x 1536 compressed

3D Compatibility

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p
Frame-Packing (Full HD 3D) | Side-by-Side | Frame Sequential (3D Ready)
Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Application

Very large screen width and rooms with plenty of light and shaded daylight.

Light Source

2 x 200W NSH Lamp
Articel Nr.: 003-100856-01 /
003-100856-02

Light Life

2000 h. 3000 h. in Eco Mode

Operating Costs

24,7% / 0,81 €

Focus

Powered

Zoom

Powered

Objective

optional

Throw Ratio

optional

Audio

No

Connections


5 x BNC RGBHV in
DVI-I in
RS232C RS422C
weitere Anschlüsse Optional

Ceiling Mounting

Yes

Power

870W

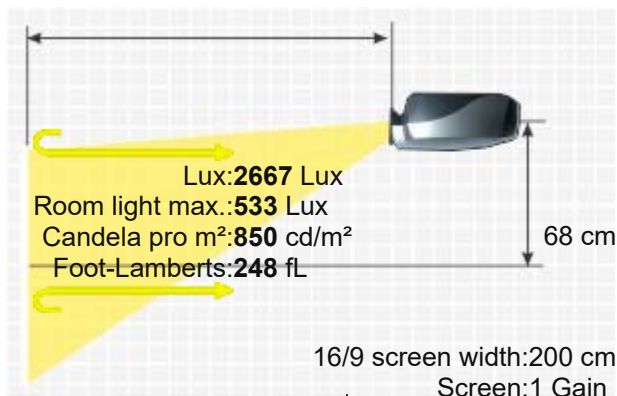


Size WxHxD 561 x 259 x 561 mm (22,1"x10,2"x22,1") 81,51 L/dm³
Operating Noise -

Weight 25,00 kg / 55,12 lbs.
Keystone -
Illumination 90%
H-sync: 15-120 kHz
V-sync: 23,97-150 Hz
Range max.: 165 MHz
Foot-Lamberts 248 fL / max. 787 cm screen width
850 cd/m²

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion motorisch
- Freeze
- Eco Mode
- Kensington Slot
- Gamma correction
- Dynamic iris
- Digital image shift
- Warping
- 24/7 continuous operation capable
- Edge Blending
- Picture-in-Picture
- Password protection
- Remote control with laser pointer
- Lan network compatible.
- Crestron®-Software compatible.

Optional Osram bulb only NLMP18816
Lamp ruby Ruby-LMP18816
Lamp original 003-100856-01 / 003-100856-02

Order here: <https://www.hcinema.de/lampen/shop-en.php?id=n9000742>

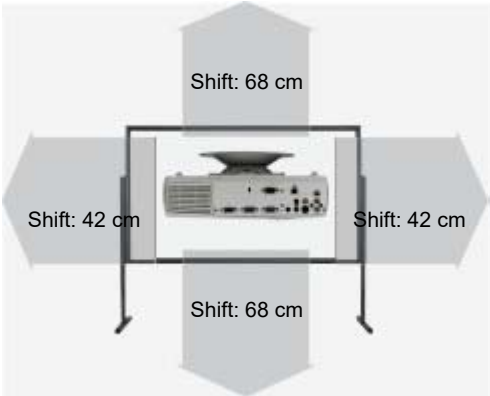

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
6.9-10.4:1	6.9-10.4:1	13.8-20.8 m	+/-60%	+/-21%	Powered
4.1-6.9:1	4.1-6.9:1	8.2-13.8 m	+/-60%	+/-21%	Powered
2.6-4.1:1	2.6-4.1:1	5.2-8.2 m	+/-60%	+/-21%	Powered
1.8-2.6:1	1.8-2.6:1	3.6-5.2 m	+/-60%	+/-21%	Powered
1.4-1.8:1	1.4-1.8:1	2.8-3.6 m	+/-60%	+/-21%	Powered
1.16-1.49:1	1.16-1.49:1	2.3-3 m	+/-60%	+/-21%	Powered
Fix Optional Lenses					
1.1:1	1.1:1	2.2 m	+/-60%	+/-21%	No Zoom
0.67:1	0.67:1	1.3 m	+/-25%	+/-10%	No Zoom

Status 2010 Discontinued (EOL) // Last update of the data: 2023-08-04



More Details



<https://www.projector-database.com/pro/christiemiragehd6km-en.html>