

Optoma ZU660

OPTOMA ZU660



A brief introduction to the Optoma ZU660. The DLP laser projector has a WUXGA 1920 x 1200 resolution and a contrast of 2000:1. The manufacturer specifies a laser life of 20000 hours, which converts to over 13.7 years at 4 hours per day. The horizontal and vertical keystone correction allows the projector to be positioned very freely. Thanks to the brightness of 6000 Ansi lumens, a picture width of 787 cm is possible. The projector can also handle slightly brighter rooms with a narrower image width (we recommend max. 525 cm). The model is also Full HD 1080P and 3D compatible, meaning it can even project Blu-rays onto the ceiling thanks to 360° projection. On the market since 2018, the model is no longer offered by the manufacturer Optoma, but is still one of the very popular projectors.



DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Projector	6000 / 6500 Center Lumen	Screen	2667 Lux (200 cm Screen width)
	2000:1 full on/off		2000:1 full on/off
	3,0000 min. Lumen		1,335 min. Lumen

Vert.: +/-50% Hori.: +/-15%

WUXGA 1920 x 1200

2.304.000 Pixel

Pal, SECAM, NTSC, HDTV 720p, 1080i, 1080p, 3D, EDTV 480p, 576p

Frame-Packing (Full HD 3D) | Side-by-Side | Top-and-Bottom

Frame Sequential (3D Ready)

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Very large screen width and rooms with plenty of light and shaded daylight.

Laser

Article Nr.: BR-3074W / SP.72N03GC01

20000 h.

0,00 € Laser

Powered


Powered 15,28

optional

optional

Nein

2 x HDMI 1.4 in
DVI-D in
D-Sub 15 pin in und out
3D Sync in und out

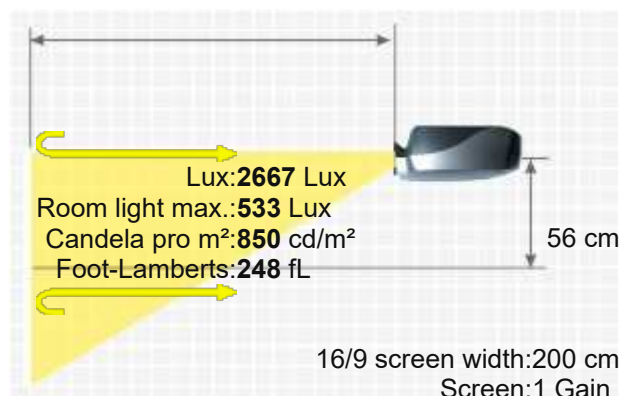

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

3D Compatibility

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

RS232C Din 9 pin in
RJ45
HDBaseT in



Ceiling Mounting
Power
Size WxHxD
Operating Noise

Yes, is possible.
620W / 455W in Eco Mode
484 x 185 x 509 mm (19,1"x7,3"x20") 45,58 L/dm³
35 / 34 dB in Eco Mode

Weight
Keystone
Illumination

17,00 kg / 37,48 lbs.
Vert.: +/-20°
Hori.: +/-20°
85%

Frequenz

H-sync: 15-91 kHz
V-sync: 24-120 Hz

Foot-Lamberts


248 fL / max. 787 cm screen width
850 cd/m²

Features

- Real Full HD 3D
- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Kensington Slot
- 360° installable
- 24/7 continuous operation capable
- Picture-in-Picture
- PJLink™
- Lan network compatible.
- Crestron®-Software compatible.
- 4 Segment RYGB
- Digital Zoom -5 V/H ~ +40V/H

Screen Mirroring

-

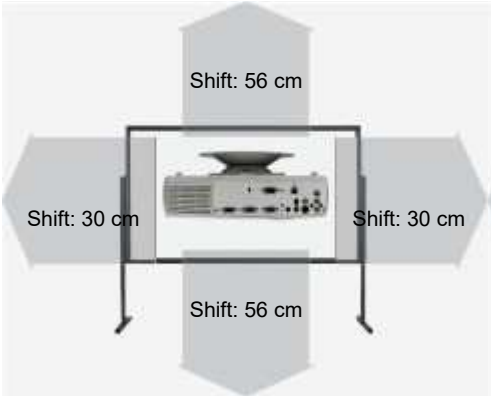

Optional accessories

	Objektiv Original	BX-CTA02	EOL €
	Fernbedienung Original	BR-3074W / SP.72N03GC01	44,33 €
	Deckenhalterung Länge 225 mm	Halterung45	83,60 €

Optional Lenses

Name	Ratio	Distance	Shift V	Shift H	Zoom
A13	2.9-5.5:1	580-1100 m	+/-50%	+/-15%	Powered
A03	1.52-2.92:1	304-584 m	+/-50%	+/-15%	Powered
A02	1.22-1.52:1	244-304 m	+/-50%	+/-15%	Powered
A01	0.95-1.22:1	190-244 m	1.28% Fix	+/-15%	Powered
A15	0.75-0.95:1	150-190 m	1.28% Fix	+/-15%	Powered
A16	0.37:1	74 m	1.28% Fix	+/-15%	No Zoom

Status 2018 Discontinued (EOL) // Last update of the data: 2026-01-26
Created: 2018-05-06 18:01:35

Data





HCinema

<https://www.projector-database.com/pro/optomazu660-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.