

projectiondesign F30 1080

PROJECTIONDESIGN F30 1080



The F30 1080 BrilliantColor DLP projector from projectiondesign has 4100 Ansi-Lumen, a contrast of 7500:1 and a HDTV 1920 x 1080 resolution. Including a lens shift and keystone correction function, which provides freedom during installation. 4100 Ansi lumens ensure that a picture width of 651 cm is also possible. The projector creates rooms with residual light with a smaller image width, we recommend a maximum of 434 cm. Furthermore, the projector can play 1080P without any problems. It was launched in 2008 and is no longer offered by the manufacturer projectiondesign, but is still very popular in our projector database.



1 x 0,95" LVDS DC3 DLP Chip
HDTV 16/9 Ti Digital Light Processing Chip

Brief Introduction

Beta 2.5

Display Type

Ansi-Lumen

Contrast

Black Level

Lens shift

Resolution

Video Modes

Application

Light Source

Light Life

Operating Costs

Focus

Zoom

Objective

Throw Ratio

Audio

Connections

Projector 4100

7500:1 full on/off

0,5467 min. Lumen

Vert.: +/-62,5% Hori.: +/-45%

HDTV 1920 x 1080

2.073.600 Pixel

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

2 x 300W UHP Lamp

Article Nr.: 400-0600-00

1700 h. 6000 h. in Eco Mode

-

Powered

Powered 1,25

F=2,1-6,5 f=34,1-42,7 mm

1,60-2,32:1


Nein

HDMI 1.3a
DVI-D mit HDCP in
5 x BNC RGBHV in
YUV in
Cinch Video in
RJ45 in
RS232C Din 9pin in

Screen 1822 Lux (bei 200 cm Screen)

7500:1 full on/off

0,243 min. Lumen

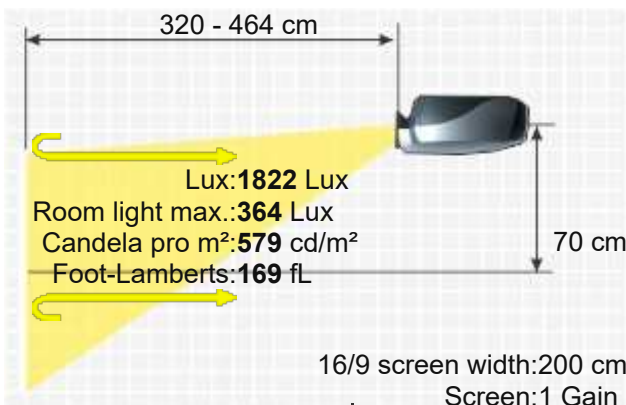


USB in
12V Trigger



Ceiling Mounting	Yes, is possible.
Power	1050W
Size WxHxD	510 x 223 x 379 mm (20,1"x8,8"x14,9") 43,1 L/dm³
Operating Noise	30 dB in Eco Mode

Weight	12,60 kg / 27,78 lbs.
Keystone	Vert.: +/-30° Hori.: +/-15°
Illumination	-
Frequenz	H-sync: 15-150 kHz V-sync: 48-190 Hz Range max.: 205 MHz
Foot-Lamberts	169 fL / max. 651 cm screen width 579 cd/m²

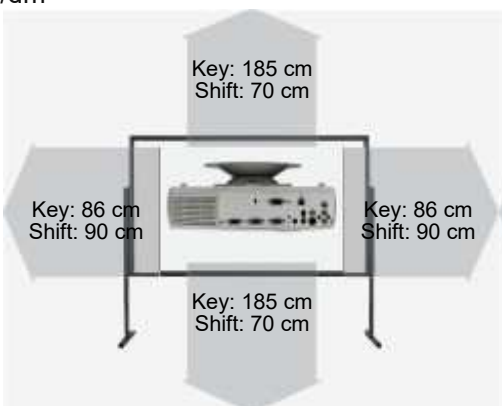

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Gamma correction
- Digital image shift
- Warping
- 24/7 continuous operation capable
- BrilliantColor™
- Remote control with laser pointer
- Remote control with backlight
- Lan network compatible.
- Colour wheel options:
- VizSim (RGBCMY) (standard)101-1405-xx
- Graphics (RGBCYW) (option)101-1407-xx
- High Brightness (RGBCYW) option 101-1406-xx

Screen Mirroring -

Optional accessories

	Nackte Philips Lampe	NLMP16650	70,82 €
	Lampe Ruby	Ruby-LMP16650	170,11 €
	Lampe Original	R9801264 / 400-0600-00	EOL €
	Objektiv Original	R9801249 / EN16	EOL €
	Objektiv Original	R9801228 / EN13	EOL €
	Objektiv Original	R9801225 / EN15	EOL €
	Objektiv Original	R9801218 / EN12	EOL €
	Objektiv Original	R9801214 / EN11	EOL €
	Objektiv Original	R9801209 / EN14	EOL €
	Deckenhalterung 220	Halterung45	83,60 €

Optional Lenses					
Name	Ratio	Distance	Shift V	Shift H	Zoom
Zoom Optional Lenses					
EN16	3.8-6.5:1	7.6-13 m	+/-62.5%	+/-45%	Powered
EN14	2.37-3.79:1	4.7-7.6 m	+/-62.5%	+/-45%	Powered
EN13	1.24-1.6:1	2.5-3.2 m	+/-62.5%	+/-45%	Powered
EN11	1.6-2.32:1	3.2-4.6 m	+/-62.5%	+/-45%	Powered
Fix Optional Lenses					
EN15	1.16:1	2.3 m	+/-62.5%	+/-45%	No Zoom
EN12	0.79:1	1.6 m	0.0% Fix		No Zoom
Status	2008 Discontinued (EOL) // Last update of the data: 2025-03-03				



HCinema

<https://www.projector-database.com/pro/projectiondesignef301080-en.html>

More Details

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.