

projectiondesign F30 wuxga



The Stationary F30 wuxga BrilliantColor DLP projector from projectiondesign has 4300 ANSI lumens, a contrast ratio of 7500:1, and a WUXGA 1920 x 1200 resolution. It includes a lens shift and keystone correction function, which provides flexibility during installation. An image width of up to 666 cm is possible; if the image width is smaller (we recommend max. 444 cm), rooms with residual light are also no problem. Furthermore, the projector can play 1080P without any problems. The projector was launched in 2008 and is no longer sold by the manufacturer.

Brief Introduction Beta 2.5

Display Type

 1 x 0,95" LVDS DC3 DLP Chip
WUXGA 16/9 Ti Digital Light Processing Chip

Ansi-Lumen

4300

1911 Lux (bei 200 cm Screen)

Contrast

7500:1 full on/off

7500:1 full on/off

Black Level

0,5733 min. Lumen

0,255 min. Lumen

Lens shift

Vert.: +/-62,5% Hori.: +/-45%

Resolution

WUXGA 1920 x 1200

2.304.000 Pixel

Video Modes

UXGA 1600 x 1200 compressed

PAL, SECAM, NTSC, HDTV 720p, 1080i, 1080p EDTV 480p, 576p

Application

Stationary | Permanent installation in the training room and meeting room as well as the conference room.

Wide screen width or rooms with plenty of light (over 200 lumens).

Light Source

2 x 300W UHP Lamp

Article Nr.: R9801272 / 400-0400-00 /

400-0500-00

Light Life

1700 h. 6000 h. in Eco Mode

Operating Costs

24,78% / 0,86 €

Focus

Powered

Zoom

Powered 1,25

Objective

F=2,1-6,5 f=34,1-42,7 mm

Throw Ratio

1,60-2,32:1

Audio

Nein

Connections

HDMI 1.3a

DVI-D mit HDCP in

5 x BNC RGBHV in


YUV in

Cinch Video in

RJ45 in

RS232C Din 9pin in

USB in

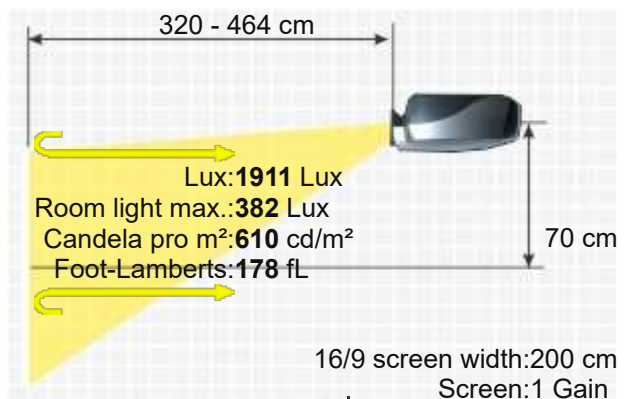

12V Trigger




Ceiling Mounting	Yes, is possible.
Power	1050W
Size WxHxD	510 x 223 x 379 mm (20,1"x8,8"x14,9") 43,1 L/dm³
Operating Noise	30 dB in Eco Mode

Weight	12,60 kg / 27,78 lbs.
Keystone	Vert.: +/-30° Hori.: +/-15°
Illumination	-
Frequenz	H-sync: 15-150 kHz V-sync: 48-190 Hz Range max.: 205 MHz
Foot-Lamberts	178 fL / max. 666 cm screen width 610 cd/m²

- Full HD 1080P compatible
- Lens shift Funktion
- Eco Mode
- Gamma correction
- Warping
- 24/7 continuous operation capable
- BrilliantColor™
- Remote control with laser pointer und mouse control
- Remote control with backlight
- Lan network compatible.
- Faroudja DCDi
- Colour wheel option:
- VizSim (RGBCMY) (standard)101-1405-xx
- Graphics (RGBCYW) (option)101-1407-xx
- High Brightness (RGBCYW) option 101-1406-xx

Screen Mirroring

-

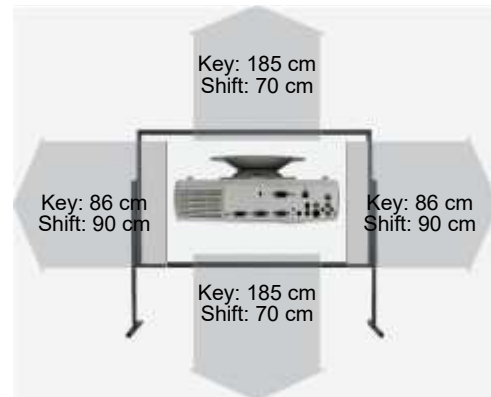

Optional accessories

	Nackte Osram Lampe	NLMP5064	103,58 €
	Lampe Ruby	Ruby-LMP5064	144,87 €
	Lampe Original	R9801272 / 400-0400-00 / 400-0500-00	728,74 €
	Kompatible Lampe	LMP-K15468	70,34 €
	Objektiv Original	R9801249 / EN16	EOL €
	Objektiv Original	R9801228 / EN13	EOL €
	Objektiv Original	R9801225 / EN15	EOL €
	Objektiv Original	R9801218 / EN12	EOL €
	Objektiv Original	R9801214 / EN11	EOL €
	Objektiv Original	R9801209 / EN14	EOL €
	Deckenhalterung Länge 225 mm	Halterung45	85,80 €

Name	Ratio	Optional Lenses			
		Distance	Shift V	Shift H	Zoom
		Zoom Optional Lenses			
EN16	3.8-6.5:1	7.6-13 m	+/-62.5%	+/-45%	Powered
EN14	2.37-3.79:1	4.7-7.6 m	+/-62.5%	+/-45%	Powered
EN13	1.24-1.6:1	2.5-3.2 m	+/-62.5%	+/-45%	Powered
EN11	1.6-2.32:1	3.2-4.6 m	+/-62.5%	+/-45%	Powered
Fix Optional Lenses					
EN15	1.16:1	2.3 m	+/-62.5%	+/-45%	No Zoom
EN12	0.79:1	1.6 m	0.0% Fix		No Zoom
Status	2008 Discontinued (EOL) // Last update of the data: 2025-03-03				



HCinema

<https://www.projector-database.com/pro/projectiondesignef30wuxga-en.html>

Due to our ongoing commitment to continuously improve the quality of our projector database, this brochure is also subject to change without notice. HCinema is not responsible for any errors or omissions contained in product descriptions.